

IR Sensor Switch

Model No. IRS01-6A

IR Sensor Switch can control DC 12V/24V directly driven led lighting products, such as led cabinet light, led rigid bar and led strip. It works great fro cabinets, drawers, closet doors, boxes, etc.

- React sensitively within 5inches
- Work as an On/Off Switch
- Includes 3M double coated tissue tape for easy placement in any surface
- Ultra low profile and slick design
- Handle big loads up to 144W capability
- 2 years warranty




Specification

Input Voltage	DC 12V/24V
Max Current	6A
Max Power	72W at DC 12V input 144W at DC 24V input
Dimension	1.21*0.34*1.50in
Cable	Input cable 4 5/8 in Output cable 8 1/2 in
Working Temperature	32-165F

Instruction

- 1) Mounted behind the door.
- 1) Open the door, the light will turn on.
- 2) Close the door, the light will tun off.

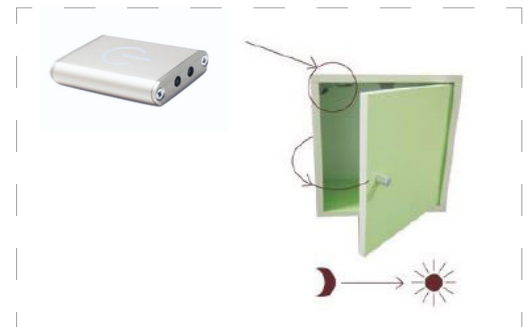

Wiring Connection

