



**FLOOR COVERING INSTALLATION
AND
CONCRETE SURFACE PREPARATION EQUIPMENT**



TABLE OF CONTENTS

SURFACE PREPARATION **Pages**

Floor Machines.....	1-2
Floor Machine Attachments	3-6
Diamabrush	7
Spud Bars.....	8
Carpet Removal.....	9
Chemicals.....	10

FLOOR STRIPPERS

Bronco	11-14
464R Stripper	15
Heavy Duty Strippers	16
Stripper Specifications	17
Blades	18-20

MOISTURE/PH MEASUREMENT

Protimeter	21-22
Delmhorst/pH Meter.....	23-25
Calcium Chloride.....	26
Gram Scales.....	27
Concrete Thickness Gauge	28

MATERIAL HANDLING

Uni-Lift.....	29
Carpet Carts.....	30

CARPET INSTALLATION **Pages**

Knee Kicker/Shark Teeth.....	31
Stretcher Hook/Kicker pick	32
Seam Weld Iron	33
Seaming Irons / Seam Rollers.....	34-36
Seaming Iron Parts.....	37-38
Trimmers / Cutters.....	39
E-Z Tuck/Nail Driver	40
Triple Tack Stapler / Heat Gun.....	41
Glue Gun	42
Hammer / Hatchet / Super Bar / Saws.....	43
Mallets / Power Shunting Device	44
Tool Pouches / Brooms	45
Carpet Kit / Tool Box	46

LINOLEUM & VINYL TOOLS

LEISTER Welding Tools	47-49
ACCUTRAK Groover	50
ACCUTRAK Parts.....	51
MOZART Trimmers.....	52
MOZART Accessories	53

RESTORATION TOOLS

Wood / Ceramic / Vinyl Doctor.....	54
------------------------------------	----

SURFACE PREPARATION



#485.17 Extreme Machine

With a heritage of 15 plus years of solid performance in the field, the Extreme Machine is one of the most rugged and beefy grinders on the market today. With cast aluminum base, this buffer shrugs off the abuse of grinding, scarifying and sanding concrete. An optional 40 lb. weight kit is also available.

The Extreme Machine features a triple planetary gear unit with a steel coupling. That's why it has a **1 YEAR WARRANTY** on parts and labor even when used with the EZ Scrape and grinding attachments. Some of the key features and benefits of this machine include:

- Solid steel gearbox coupler system with cast aluminum motor cover.
- Dual safety switch levers.
- Totally enclosed external fan prevents concrete dust and grit from entering the motor windings and wearing the motor out.
- Triple planetary gear box with steel coupling.
- Made in the USA.

Extreme Machine Applications:

- Stone grinding and polishing
- Cement grinding and polishing
- Mastic removal
- Scarifying
- Sanding and screening

#483 Commercial Buffer

Ideal for light duty applications, the Commercial Buffer combines loads of power, terrific features at a great price. This buffer shares many of the same new features as the higher-end Floor Prep Plus grinder including:

- Ergonomic, easy to reach handle adjustments.
- 1 year warranty.
- Wrap around cord clamp and strain relief.
- Assembled in the USA.

#483 Commercial Buffer

Applications:

- Floor scrubbing
- Finish stripping
- Light buffing
- Carpet bonneting
- Sanding and screening

#490 Floor Prep Plus 17" and 20" Machines

Born from the Extreme Machine, the Floor Prep Plus offers many of the same features, but at an even more affordable price. Floor Prep Plus is available in both 17" and 20" sizes and an optional weight kit (up to 42 lbs).

Some of the key features of this unique grinder include:

- Solid steel gearbox coupler system with chrome-plated motor.
- "safe-start" power indicator. Won't run away on startup!
- Ergonomic, easy to reach handle adjustments
- Same solid shear pin coupling found in our popular #485 Extreme Machine.
- 1 year warranty on parts and labor even when used with the Taylor EZ Scrape Prep Plus.
- Assembled in the USA.

Prep Plus Applications:

- Stone grinding and polishing
- Cement grinding and polishing
- Scarifying
- Sanding and screening



SURFACE PREPARATION

FLOOR MACHINE COMPARISON

Model:	Extreme Machine 17"	Floor Prep Plus 17"	Floor Prep Plus 20"	Commercial Buffer
Part Number	#485.17	#490.17	#490.20	#483.17
Motor horsepower	1.5 HP	1.5 HP	1.5 HP	1.5 HP
Gear box	Triple-Planetary	Triple-Planetary	Triple-Planetary	Triple-Planetary
Brush/pad speed RPM	175 RPM	158 RPM	158 RPM	175 RPM
Voltage	115v	115v	115v	115v
Power cord length	50 ft.	50 ft.	50 ft.	50 ft.
Product Weight	102 lbs	111 lbs	114 lbs	77 lbs
Base Construction	Cast aluminum	Dual-wall, rotation-ally molded impact resistant polyethylene	Dual-wall, rotation-ally molded impact resistant polyethylene	Dual-wall, rotation-ally molded impact resistant polyethylene
Motor Housing	Cast Iron	Sheet metal	Sheet metal	Sheet metal
Handle Construction	Welded structural steel tubing	Welded structural steel tubing	Welded structural steel tubing	Welded structural steel tubing
Safety interlock on triggers	Yes	Yes	Yes	Yes
Vertical handle safety lockout	No	Yes	Yes	Yes
Handle adjustment	Base of machine	Lever at operator position near triggers	Lever at operator position near triggers	Lever at operator position near triggers

Specifications are approximate and may vary slightly

SURFACE PREPARATION



40# Weight Attachment* #485.17.651

Adding this additional 40 lb weight to your buffer (Extreme Machine only) provides extra downward force to let your machine really dig into those hard-to-remove accumulation spots. Virtually double the production of any attachment.

*Above attachment for use on the #485.17 only.



Floating Dust Control Ring #485.17.DC.R

Fits #485.17 Extreme Machine and #490.17 Floor Prep Machine.

Fits on all of the Taylor Tools 17" machines and will instantly convert your machine to dust free operation when attached to a proper vacuum system, (removal of the grey bumper is required to install the dust control ring). The floating dust control ring is designed to maintain the dust seal between the floor and the base of the machine by floating (no attachment to the machine). This insures that, as the brushes wear, they will always make proper contact with the floor. Extreme Machines and Floor Prep Plus machines come equipped with a vacuum nozzle for dust control. The Commercial Buffer (part #483.17) will require the addition of a vacuum port (part #485.17.DC.1-1/2).



Weight Attachment for Floor Prep Plus Machine #490.535002

This weight set is for use on the Floor Prep Plus machines only (490.17 and 490.20) and will improve the efficiency of all of the cutting and grinding attachments available, (no additional weights should be used with Diamabrush products).

The two weights can be used together or individually depending on your need for additional weight. Each weight is 21 lbs. for a total of 42 lbs. when used together.



Solution Tank w/Flow Control #490.548601

This solution tank with flow control will work on all of the Taylor Tools buffers and most popular floor buffing and grinding machines that have a solution connection to the base. All necessary hardware is supplied with the tank.

SURFACE PREPARATION

Attachments for the Extreme Machine



Plastic Clutch Plate installed



One additional aluminum clutch plate included



Silicon Abrasive Brushes

Silicon carbide infused nylon brushes self-replenish as brush wears to outlast floor pads 100 to one! The best thing for uneven surfaces, wood or concrete. Use 2" smaller than buffer. Comes in 13", 15", & 17" diameters.

SAB.46	Silica Abrasive Brush 46 Grit, Brown
SAB.80	Silica Abrasive Brush 80 Grit, Black
SAB.180	Silica Abrasive Brush 180 Grit, Blue
SAB.500	Silica Abrasive Brush 500 Grit, Grey

EZ Scrape

Removes cutback, multi-purpose adhesives and other hard-to-remove floor residue quickly and easily. No chemicals or disposal issues. The EZ Scrape is a dry removal system. Removes: Paint, Cured Adhesives, Rubber Padding, even Urethane Adhesives.

The EZ Scrape is supplied with a plastic clutch plate for use on standard buffers. An aluminum clutch plate is also provided for use on heavy duty buffers such as the Taylor Tools Extreme Machine #485.17 if preferred. Use of the aluminum clutch plate on a standard duty buffer with an EZ Scrape may cause damage to the machine and will not be covered under warranty.

- #472 - 13" disk for 15" machines
- #471 - 15" disk for 17" machines
- #470 - 17" disk for 19" & 20" machines

EZ Scrape Carbide Blades



#470.15

Carbide replacement blades for the EZ Scrape don't get any better than these high pressure blades that are guaranteed to stay sharper and last far longer than any other blades on the market.



#470.15B

If initial cost is a major consideration, you can't go wrong with these standard grade carbide blades at a very modest price.



Multi-Head

#485.MH
Comes with six 4" dia. x 1/2" thick velcro pads.
(#485.1602)



1/2" Replacement Velcro Pad
#485.1602



1/4" Titan Puck

For surface profile and adhesive preparation. Removal of rubber padding. #485.1610
Attachment: Bolt on



1/8" Titan Puck

For paint and adhesive removal. #485.1608
Attachment: Bolt on



Mounting Plate for Blue Diamond Cup

5/8" Male #485.1659



Blue Diamond Cup
4" 30 grit diamond plate

For grinding and concrete removal. #485.1617
Attachment: Mounting Plate



4" 30 Grit Diamond Plate

For sanding and concrete removal.



"Red Devil" 4" 30 Grit Diamond Plate

For grinding and concrete removal. #485.1618
Attachment: Bolt on

SURFACE PREPARATION



Sand Paper Driver

This driver is made from a plastic one piece block. A 3/8" foam pad and stamped metal centering device provide the holding power. Universal Clutch Plate to fit most machines.

#485.17.10 for 17" Extreme Machine

#485.20.10 for 20" Extreme Machine



Double-Sided Titanium Shredder

#485.17.1296

This tough attachment is virtually indestructible and has 10 grit on both sides. (Requires a sandpaper driver)




Pad Driver

The molded polymer pad face has hundreds of individual hooks that grip into the threads of a floor pad and hold it securely while operating. The solid block includes a built-in riser and holes allow use with solution dispensing machines.

#485.17.11 for 16" and 17" floor buffing machine

#485.20.11 for 20" floor buffing machines

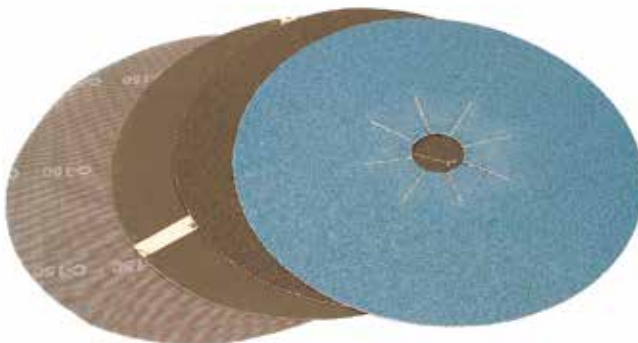

Sand Paper

See reverse side for part numbers and options.



4" scalloped quick stick



SURFACE PREPARATION

Sand Paper Specifications

Part No.	Grit	Backing	Pkg Qty.	Part No.	Grit	Backing	Pkg Qty.	Part No.	Grit	Backing	Pkg Qty.
16" X 2" DISK 1 Sided, Diamond Back Zirconium				19" X 2" DISK 2 Sided, Silicon Carbide				1/4" Thick FINISHRITE PADS Use W/ Screens or AOS PAPER			
485.120.024Z	24 Grit	DBZ - CLOTH	10	485.253.012	12 Grit	SIC - PAPER	10	485.130.016	16"	FINISHRITE PAD	20
485.120.030Z	30 Grit	DBZ - CLOTH	10	485.253.016	16 Grit	SIC - PAPER	10	485.130.019	19"	FINISHRITE PAD	20
485.120.036Z	36 Grit	DBZ - CLOTH	10	485.253.020	20 Grit	SIC - PAPER	10	4 1/2" Scalloped Quick Stick			
485.120.040Z	40 Grit	DBZ - CLOTH	10	485.253.024	24 Grit	SIC - PAPER	10	485.255.220	240 Grit	SIC - CLOTH	100
485.120.050Z	50 Grit	DBZ - CLOTH	10	485.253.030	30 Grit	SIC - PAPER	10	485.255.400	400 Grit	SIC - CLOTH	100
485.120.060Z	60 Grit	DBZ - CLOTH	10	485.253.036	36 Grit	SIC - PAPER	10	485.255.600	600 Grit	SIC - CLOTH	100
485.120.080Z	80 Grit	DBZ - CLOTH	10	485.253.040	40 Grit	SIC - PAPER	10	485.255.024A	24 Grit	AOP CLOTH	100
485.120.100Z	100 Grit	DBZ - CLOTH	10	485.253-050	50 Grit	SIC - PAPER	10	485.255.150A	150 Grit	AOP CLOTH	100
485.120.120Z	120 Grit	DBZ - CLOTH	10	485.253.060	60 Grit	SIC - PAPER	10	485.255.180A	180 Grit	AOP CLOTH	100
16" X 2" DISK 2 Sided, Silicon Carbide				485.253.080	80 Grit	SIC - PAPER	10	485.255.036Z	36 Grit	DBZ - CLOTH	100
485.121.012	12 Grit	SIC - PAPER	10	485.253.100	100 Grit	SIC - PAPER	10	485.255.040Z	40 Grit	DBZ - CLOTH	100
485.121.016	16 Grit	SIC - PAPER	10	485.253.120	120 Grit	SIC - PAPER	10	485.255.060Z	60 Grit	DBZ - CLOTH	100
485.121.020	20 Grit	SIC - PAPER	10	485.253.150	150 Grit	SIC - PAPER	10	485.255.080Z	80 Grit	DBZ - CLOTH	100
485.121.024	24 Grit	SIC - PAPER	10	19" X 2" DISK, 1 Sided, Diamond Back Zirconium				485.255.100Z	100 Grit	DBZ - CLOTH	100
485.121.030	30 Grit	SIC - PAPER	10	485.271.024Z	24 Grit	DBZ - CLOTH	10	485.255.120Z	120 Grit	DBZ - CLOTH	100
485.121.036	36Grit	SIC - PAPER	10	485.271.036Z	36 Grit	DBZ - CLOTH	10	4 1/2" Quick Stick SCREENS			
485.121.040	40 Grit	SIC - PAPER	10	485.271.040Z	40 Grit	DBZ - CLOTH	10	485.256.060	60 Grit	SCREENS	100
485.121.050	50 Grit	SIC - PAPER	10	485.271.050Z	50 Grit	DBZ - CLOTH	10	485.256.080	80 Grit	SCREENS	50
485.121.060	60 Grit	SIC - PAPER	10	485.271.060Z	60 Grit	DBZ - CLOTH	10	485.256.100	100 Grit	SCREENS	100
485.121.080	80 Grit	SIC - PAPER	10	485.271.080Z	80 Grit	DBZ - CLOTH	10	485.256.120	120 Grit	SCREENS	100
485.121.100	100 Grit	SIC - PAPER	10	485.271.100Z	100 Grit	DBZ - CLOTH	10	485.256.150	150 Grit	SCREENS	100
485.121.120	120 Grit	SIC - PAPER	10	485.271.120Z	120 Grit	DBZ - CLOTH	10	485.256.180	180 Grit	SCREENS	100
485.121.150	150 Grit	SIC - PAPER	10	16" SCREENS				485.256.220	220 Grit	SCREENS	100
19" X 2" DISK 1 Sided, Silicon Carbide				485.125.060	60 Grit	Screen	10	Silicon Carbide Cloth Backed			
485.129.012	12 Grit	SIC - PAPER	10	485.125.080	80 Grit	Screen	10	PC221.16.16	16" x 16 Grit	10/Box	
485.129.016	16 Grit	SIC - PAPER	10	485.125.100	100 Grit	Screen	10	PC221.16.24	16" x 24 Grit	10/Box	
485.129.020	20 Grit	SIC - PAPER	10	485.125.120	120 Grit	Screen	10	PC221.16.80	16" x 80 Grit	10/Box	
485.129.024	24 Grit	SIC - PAPER	10	485.125.150	150 Grit	Screen	10	PC221.20.24	20" x 24 Grit	10/Box	
485.129.030	30 Grit	SIC - PAPER	10	485.125.180	180 Grit	Screen	10	PC221.7.7/8-24	7-7/8" x 24 Grit	25/Box	
485.129.036	36 Grit	SIC - PAPER	10	485.125.220	220 Grit	Screen	10	SIC = Silicone Carbide - stays sharp			
485.129.040	40 Grit	SIC - PAPER	10	19" SCREENS				AOP = Aluminum Oxide - lasts long but not as sharp as silicone carbide			
485.129.050	50 Grit	SIC - PAPER	10	485.132.060	60 Grit	Screen	10	DBZ = Diamond Back Zirconium - stays sharp, long lasting, most aggressive.			
485.129.060	60 Grit	SIC - PAPER	10	485.132.080	80 Grit	Screen	10				
485.129.080	80 Grit	SIC - PAPER	10	485.132.100	100 Grit	Screen	10				
485.129.100	100 Grit	SIC - PAPER	10	485.132.120	120 Grit	Screen	10				
485.129.120	120 Grit	SIC - PAPER	10	485.132.150	150 Grit	Screen	10				
				485.132.180	180 Grit	Screen	10				
				485.132.220	220 Grit	Screen	10				

SURFACE PREPARATION

Works great on the #484 Floor Spec Buffer!



Concrete Removal and Prep Tool

Grind concrete with your standard duty floor buffer (200 rpm max), without fear of damaging your machine. Because the direction of rotation pulls the diamonds across the surface, danger from catching on a crack or expansion joint is eliminated.

Designed with a replaceable latch "blade" concept to easily change used or worn down blades by simply replacing each individual blade.

DB.CNC.13.100 13" Concrete Tool for 15" Machine (100 Grit)
DB.CNC.15.100 15" Concrete Tool for 17" Machine (100 Grit)
DB.CNC.17.100 17" Concrete Tool for 20" Machine (100 Grit)



Hardwood Tool

You can use your standard duty floor buffer (200 rpm max), without fear of damaging your machine. Because the direction of rotation pulls the diamonds across the surface, danger from gapped boards or cut outs such as heater vents catching the tool are eliminated. Diamonds are 50 grit and used primarily to remove hard surface finishes. Subsequent sanding should start at 60 grit or coarser.

DB.HDW.15.50 15" Hardwood Tool for 17" Machine (50 Grit)




Concrete Prep Plus

The Concrete Prep Plus is the answer for coating removal on porous, rough concrete surfaces where you can't use an EZ Scrape. The aggressive metal backed diamonds attack cured coatings on rough surfaces. It can even be used on standard buffers without fear of breaking the drive pin. Grinds faster and lasts longer than standard tool.

The 25 grit Concrete Prep Plus leaves a 25 grit profile on concrete which is sufficient for application of most epoxy and painted coatings.

Hearing protection is required when using this attachment.

For 17" Machine.
25 Grit DB.941601202 100 Grit DB.941601222

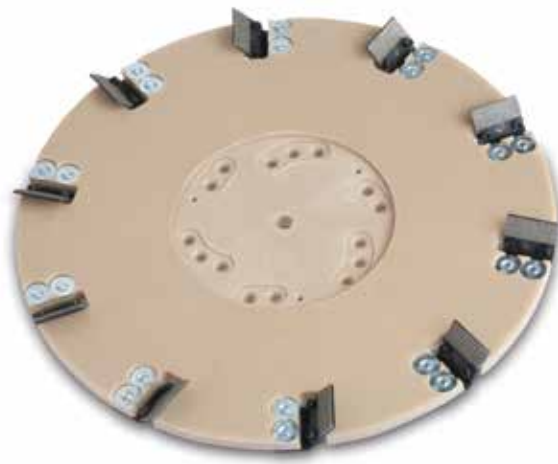

Mastic Tool

Removes stubborn coatings such as tile glue, mastic, thin set, thin mil epoxies, urethanes and paint. You can use your standard duty floor buffer (200 rpm max), without fear of damaging your machine. Because the direction of rotation pulls the diamonds across the surface, danger from catching on a crack or expansion joint is eliminated.

DB.MAS.13.25 13" Mastic Tool for 15" Machine (25 Grit)
DB.MAS.15.25 15" Mastic Tool for 17" Machine (25 Grit)
DB.MAS.17.25 17" Mastic Tool for 20" Machine (25 Grit)

SURFACE PREPARATION




Contractor-Grade Spud Bar #403/407

The most powerful, efficient design at an economical price. Twice as heavy (16 lbs.) as standard spud bars and longer length for more power. Blade holder design prevents build-up. These DURABLADE blades are **50% thicker** than standard blades.

#403.01 3" x .083" Blade
#407.01 7" x .083" Blade

Specifications:

	#403	#407
Blade width:	3"	7"
Weight:	16 lbs.	18 lbs.
Length:	66"	66"



Spud Bar #303 and #307

Spud Bar with Leverage Handle #303.03 and #307.07

For those difficult hand stripping jobs, here is a real heavyweight floor scraper with a long life. These all-steel spud bars feature .062" Durablades and a comfortable shovel handle.

And for even easier and more effective use, you can order both 3 1/2" and 7" spud bars with a unique, adjustable leverage handle. The optional handle (#308) can also be purchased separately to modify our other spud bars.

#303.01 3 1/2" blade
#307.07 7" blade
#308 Leverage handle


Specifications

	#303	#307	#303.03	#307.07	#308
Blade width:	3 1/2"	7"	3 1/2"	7"	--
Weight:	9 lbs.	11 lbs.	10.25 lbs.	12.25 lbs.	1.25 lbs.
Length:	57 1/2"	57 1/2"	57 1/2"	57 1/2"	--



Pogo Scraper, Masonry #309

Pneumatic spud bar great for ceramic and vinyl tile removal. 2500 blows/min. @5 CFM @ 90 psi. Comes w/ 2" solid chisel, blade holder and 6" x 4", 6" x 10" and 6" x 6" blades. Other blades for blade holder available for separate purchase. Hearing and eye protection must be worn.

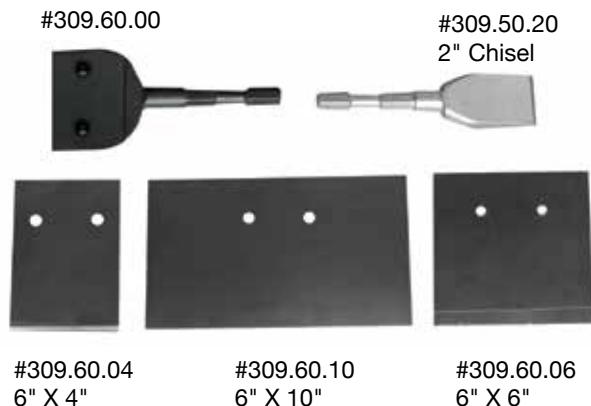


SURFACE PREPARATION


LockJaws

#200

1 or 2-man carpet clamp that takes a bite out of the biggest jobs. Lockjaws feature stainless steel teeth that really lock onto the carpet and a wide cushion-handled grip that lets a couple of guys really put some muscle into a big tear-up. You can even hook Lockjaws up to a winch.

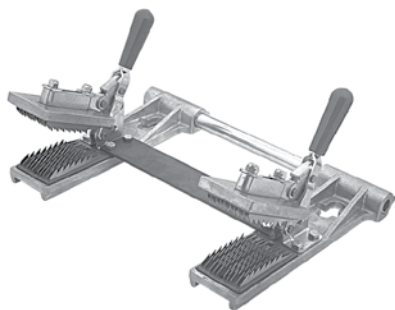

**Double Lockjaws
#202**

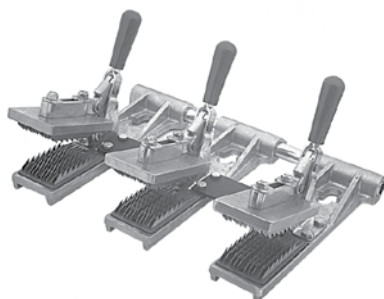

**Triple Lockjaws
#203**

For even greater holding power when removing carpet with a power winch, purchase ready-made double and/or triple Lockjaws.



**Deluxe Carpet Clamp
#824**

The Deluxe model features all cast aluminum construction which makes it a much more durable clamp because there are no welded parts. (1.5 lbs.)

SURFACE PREPARATION

REMOVE URETHANE ... EVEN CURED URETHANE!

It's the
"Urethane Buster"

OIL-FLO™ 141

There's nothing else like this terrific, water-soluble solvent cleaner. It quickly and easily dissolves many hard-to-clean organic stains and substances including urethane adhesive - even cured urethane!

Biodegradable Oil-Flo 141 is colorless, non-foaming, with a neutral pH, low odor and a high flashpoint (over 141° F). Contains no chlorinated solvents or CFC's.

Available in pint, gallon, 5 gallon, & 55 gallon containers.

Quickly and Easily Removes Hot Melt Adhesives!

Oil-Flo 141 does a spectacular job of removing hot melt adhesive and residue (even hot melt used to bond tackstrip and metal) from wood, carpet and other finished surfaces.

Can be shipped by air.

OIL-FLO 141 dissolves:

- cured urethane adhesive
- hot melt adhesive
- mastic adhesive
- asphalt
- coal tar
- cosmetics
- cutback
- graffiti
- grease
- chewing gum
- latex
- oils
- resins
- sealcoat
- tape residue
- waterproofing
- window caulk
- inks
- permanent marker
- tar

Part No.	Description	Pk.	Wt.
14012	Oil Flo 141, 1 Pint Bottles	12	1
14004	Oil Flo 141, Gallon Jugs	4	8
14005	Oil Flo 141, 5 Gallon Pail	1	45
14055	Oil Flo 141, 55 Gallon Drum	1	470



Anything AFTA could do, CS-22 can do ... better!

Now that AFTA has been discontinued, are you worried about finding a suitable replacement?

Don't be.

Because, not only does Cleanup Solvent 22 from Titan Laboratories clean as well or better than AFTA ever did, it's also a much safer solvent to use.

CS-22 is non-flammable, with much less odor and is also packaged in a safer, more convenient container. CS-22 dries quickly with no residue and does not need a water rinse.

So, don't lament over the loss of AFTA. It's really a blessing in disguise. Pick up a bottle of CS-22 at your local Taylor Tools distributor and see for yourself.

Ground shipment only. Cleanup Solvent 22 is a fast drying liquid with a multitude of uses.

- Replaces chlorinated or hazardous solvents.
- Very safe with an NFPA toxicity rating of 0.
- Dries quickly, leaving no residue.
- Non-oily
- Low odor
- Available in pint, quart, gallon, 5 gallon, & 55 gallon containers.

Removes:	Use on:
adhesives	carpets
black marks	wood
fingerprints	vinyl
oil and grease	clothing
	vehicles
	metal
	plastics
	surfaces
	wallpaper

Part No.	Description	Pk.	Wt.
22012	CS-22 Solvent, 1 Pint Bottles	12	1
22112	CS-22 Solvent, 1 Quart Bottle	12	1.75
22004	CS-22 Solvent, 1 Gallon Jugs	4	8
22005	CS-22 Solvent, 5 Gallon Pail	1	45
22055	CS-22 Solvent, 55 Gallon Drum	1	470

SOME COMPARISONS	CS-22	Discontinued AFTA
NFPA RATING (0 = Best, 4 = Worst) HEALTH-FLAMMABILITY-REACTIVITY	1-2-0	2-3-0
FLASHPOINT Over 100°F is desirable for shipping and storage	105°F	93°F
XYLENE CONTENT Xylene is a SARA 313 Toxic Chemical	None	10-25%
ODOR	Low	Strong
PACKAGING Plastic bottles will not rust, contents are visible, harder to tip over	Clear PET bottle	Metal can
MEETS MIL SPEC PD-680 Leaves no residue by Mil-Spec tests	YES	NO





FLOOR STRIPPERS

For the most demanding floor removal jobs - everything from direct glue down carpet and resilient installations to ceramic and hardwood - Taylor Tools offers the most complete line of floor removal equipment and tools in the industry.

For removing:

- Adhesive applied carpeting
- Resilient sheet goods
- Rubber and vinyl tile
- Plastic
- Rubber
- Ice
- Epoxy Resins
- Ceramic-Broncos & Pogo Scraper only
- Saturated felt
- Parking Lot Coatings
- Sports Track
- Cork
- Adhesives
- Paint
- Tennis court surfaces
- and other industrial accumulations



The Clean Machines

Speed Does Matter!

At 300 to 400 surface feet/minute, Broncos have more than twice the removal rate of competitive machines.

The patented (#6273513 & #8376468 B2) Bronco is a major breakthrough in floor removal equipment design.

For the first time, removal rates are not dependent on a machine's sheer size and weight. The Bronco equals or outperforms those large, heavy, expensive, awkward machines but comes in a small, compact size.


And the Bronco is available with two different power options: The low- emission, propane-powered version or the new battery- operated Hybrid Optimum Bronco. Whichever Bronco you choose, you'll get the same great features including high performance with low maintenance.

Small, but powerful, the Bronco is easy to transport in a standard garden trailer or pick-up truck rated 3/4 ton or heavier, when loaded and unloaded with a forklift. Only 29" wide, the Broncos fit in passenger elevators and through doorways making it ideal for residential applications.

The adjustable Power-Glide articulating suspension system keeps the blade engaged at all times.

The line includes hand scrapers, buffers, walk-behind strippers and, for large commercial removal jobs, you can't beat one of our compact, but powerful, Broncos.

All Strippers come with tools and an assortment of blades to get you started.

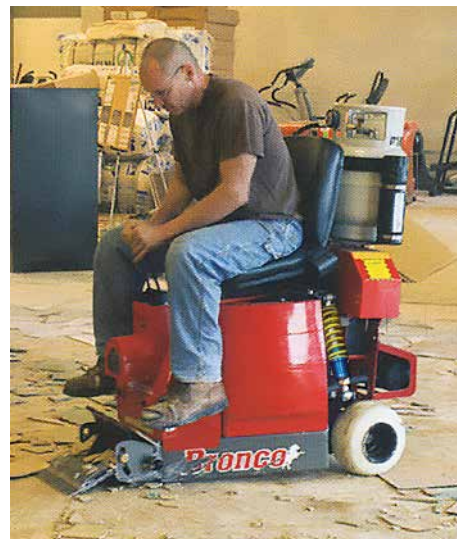

The unique, articulating Power Wedge design reaches into tight corners and provides as much power as heavier, more expensive machines. Easy-to-operate controls allow for a zero turn radius.


The Bronco has only five drive components - a motor, two pumps and two gear motors. That's why we can go the extra mile and extend every Bronco a limited 1 year warranty. The propane Bronco has a 2 year warranty on the engine. And you can lease a Bronco for as little as \$600 per month.

So, before you invest in a professional grade stripper, you owe it to yourself and the success of your company to check out the revolutionary Bronco.

Removal rates, blade life and equipment maintenance vary depending on the installation materials and techniques originally used to install the floor covering.


All Broncos Feature Taylor's Unique

Power-Glide Articulating Suspension System

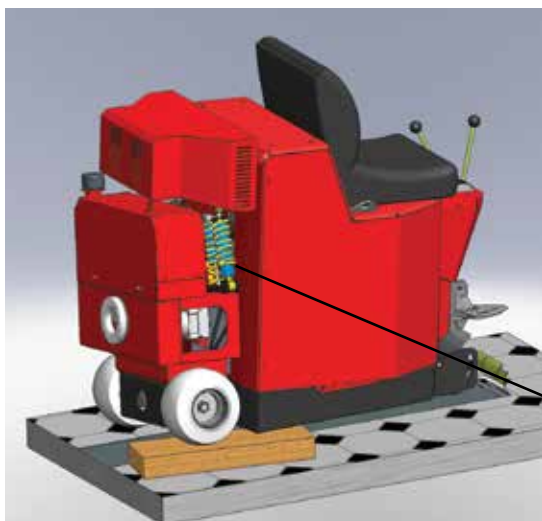

The BRONCO's patented Power-Glide articulating suspension keeps the blade completely flat to the floor while the drive wheel segment articulates to follow the floor's contours.

Suspension Cylinders

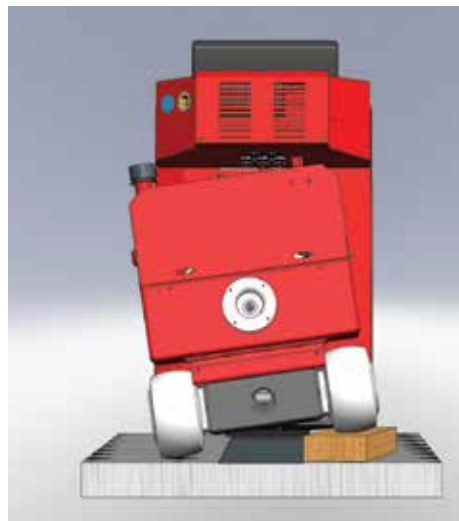

What's the secret behind the Bronco's unique ability to combine high speed removal rates with a small size & weight and smoother ride?

Well, it's something not a single one of the industry's competitive strippers has -- the Bronco's patented Power-Glide articulating suspension system.

Bronco's adjustable Power-Glide suspension allows you to use the full weight of the machine to keep the blade fully engaged to the floor.

This technological breakthrough means that we don't have to add extra weight just to keep the blade engaged. And that means we can keep the Bronco reduced in size with a smaller motor. And yet there is no sacrifice in removal rates. The Bronco is still the fastest machine available today.



Hydraulic Blade Control

A unique hydraulic lift provides faster, easier blade changing, infinitely variable blade angle adjustment and simplified transportation. Patent pending.

FLOOR STRIPPERS

Hybrid **Optimum**

Full Work Day Battery Service!

Combining speed and power with a longer lasting battery charge, you get arguably the fastest, most efficient and cost-effective battery operated floor removal machine on the market today.



Articulating Suspension

Pat. #6273513

Pat. #8376468 B2

Optimum

#260B.HL

Up To Twice The Removal Rate of Other Battery Machines!

- **Up to 15,000 sq. ft. per charge.** Battery Operated... 110V Cord-Powered... or both... It's your choice!
- **Cord-Power plus a Fully-Charged Battery** increases the operating time by 50%+!
- **Fast, convenient, On-Board Charging System** charges each battery equally. This technology greatly extends the battery pack life!
- **Full Work Day Battery Service!**
A new, more efficient motor uses less battery power for the same horsepower to greatly extend run-time (1 shift +) without sacrificing speed or removal rates. Runs even longer when operating in hybrid/corded mode.
- **Charges 50% Faster!**
The OPTIMUM's unique, new on-board charger delivers more power from the same power source to charge batteries in half the time.
- **Twice The Battery Life - Slashes Battery Costs!**
Sooner or later, all battery-operated equipment requires battery replacement. With the new OPTIMUM, it's later...much later. In fact, you'll replace batteries only half as often as competitive strippers thanks, in part, to our exclusive Battery Control System. In addition, the OPTIMUM's on-board charger eliminates the need to remove batteries for safer, faster charging.



All specifications are approximate

FLOOR STRIPPERS

2 YEAR
Limited Warranty



Articulating
Suspension



Pat. #6273513
Pat. #8376468 B2

Propane-Powered

#260P.HL

- Powerful, low-emission, high-performance, low-maintenance Kawasaki engine
- Strip up to 15,000 sq. ft. per day

Give NEW LIFE to Your Older Bronco with a **BRONCO UPGRADE!**

Here's what's included in a BRONCO UPGRADE...

Propane Broncos

- New Front Frame
- New Hydraulic Pumps 2 each.
- New Lifting Hydraulic blade lift system
- New Hydraulic hoses and fittings for lift system
- New Solid Drive Linkage System
- Control Levers if Necessary
- Motor Service and Tune Up
- New Decals
- New Owners Manual
- Touch up Painting
- 1 Year Warranty on New Items, (parts and labor)

#260P.CONV.HL

Trade Price \$5,508.00

Not included:

Wear items such as tires, seat, battery, etc., Kawasaki Motor, Hydraulic Drive Motors, Oil Tank and Filters, Propane System, Muffler, Muffler Guard. Freight costs are not included but Taylor Tools will coordinate the freight for you and pass on our freight discount. We will list any other items that need attention or replacement at the time of conversion.



Battery Bronco

- New Front Frame
- 16 New Batteries
- New Lifting Hydraulic blade lift system
- New Hydraulic hoses and fittings for lift system
- New Control Linkage
- New Transportation Wheel System
- New Battery Control System
- New Charger System
- New Decals
- New Owners Manual
- Touch up Painting
- 1 Year Warranty on New Items, (parts and labor)
- 2 Year Warranty on Batteries, (no labor)

#260B.CONV.HL

Trade Price \$13,254.90

Not included:

Wear items such as tires, seat, battery, etc., Hydraulic Drive Motors, Oil Tank and Filters, V belts, Electric Drive Motor. Freight costs are not included but Taylor Tools will coordinate the freight for you and pass on our freight discount.



FLOOR STRIPPERS

#464R with Quick Reverse Control

The #464 Self-Propelled Stripper, already the best stripper on the market, is now the #464R and it's now even better!

The #464R now has a quick reverse control lever to be used at the end of a cut or to reposition the machine. Built around the trouble-free, quiet Model 462 heavy duty stripper, this incredibly powerful machine can quickly and efficiently tackle the most difficult removal jobs - with little or no strain on the operator.

Powerful!

One motor drives the machine with 185 lbs. of thrust while a second motor provides the blade action. The operator steers the machine with little or no elbow grease required.

Fast!

In field tests, the #464R removed Collins & Aikman Power Bond glue down carpet at the rate of more than 27 lineal feet per minute (6" wide strips).

Versatile!

Removes direct glue down carpet, resilient sheet goods, vinyl tile and other difficult floor accumulations.

Economical!

The #464R Self-Propelled Stripper is far less expensive than other self-propelled strippers.

Efficient!

Gets down to and through the adhesive.

Quiet!

The #464R incorporates the #462 blade action which means a quiet operation.

Durable!

The #462 blade action means little worry about repairs and maintenance.

Reliable!

The #464R Self-Propelled Stripper comes with a one year warranty.

All specifications are approximate



1 YEAR
Limited Warranty



4 removable weights reduce the #464R & 465VDC weight from 300 lbs. to 114 lbs. for easy transportation.

FLOOR STRIPPERS

Heavy Duty Strippers

#462/#463

Super quiet, incredibly effective and practically maintenance free year after year.

#1 for over 40 years in the rental market!

Featuring a **3 YEAR WARRANTY!**

The rental proven design is longer lasting and quieter than the newer machines that have come on the market. That is why we give a 3 year limited warranty for the entire front-end assembly. The 2200 strokes a minute belt driven action and heavy gauge steel construction reduce wear on the moving parts for lower maintenance costs, fewer replacements, and quieter operation.

3 YEAR
Limited Warranty



#463

Same features as the #462 plus an easy-to-remove belt guard and no side shields

Features the new Easy-Clamp Blade Clamping System. Allows blade tightening from the top.



Stripper Accessory Package Contents

464R & 465.VDC Accessory Pack (464R.KIT / 465.VDC.KIT)

- (3) 464.06.00 6x6x.062 Tile Blade, concrete or wood.
- (3) 464.06.SD 6x6x.062 Carpet Blade, concrete or wood.
- (3) 464.07.00 6x7x.062 Tile Blade, concrete or wood.
- (1) 460.33.00 Grease Gun
- (1) Manual 464R or 465.VDC

462, 462A & 463 Accessory Pack (460.39.00.KIT)

- (2) 460.15.00 4x6 Tile Blade (concrete)
- (1) 460.16.00 5x6 Tile Blade (wood)
- (1) 460.16A.00 3x16 Carpet Blade w/Holes
- (1) 460.16S.00 3x16 Carpet Blade w/Slots
- (1) 460.30.00 16" Blade Stiffener
- (1) 460.34.00 3x10 Carpet Blade w/Holes
- (1) 460.34S.00 3x10 Carpet Blade w/Slots
- (1) 460.70S.00 7" Slotted Blade (V.C.T.)
- (1) 460.70S.SD 7" Slotted Side Cutting Blade, Carpet
- (1) 460.33.00 Grease Gun
- (1) Manual

260 & 260P.HL Broncos Accessory Pack (260.90.25)

- (1) 260.90.06 Owners Manual
- Engine Manual (propane model only).
- (1) 260P.90.06 CO2 Detector (propane model only)
- (1) 260.90.01 9/16" allen wrench
- (1) 260.90.04 Combination 3/8" allen wrench and by pass wrench
- (1) 260.90.03 1-1/8" Wrench
- (1) 165.07.SD 3x7x.083 Self-Dicing Blade

260 & 260P.HL Broncos Accessory Pack (260.90.25) (continued)

- (1) 165.10.00 3x10x.083 Bronco Blade
- (3) 166.07.00 4x7x1/8" Heavy Duty Tile Blade
- (2) 166.10.00 4x10x1/8" Heavy Duty Tile Blade
- (1) 167.04.00 4x4x1/8" Tool Steel Blade
- (1) 168.01.00 Ceramic, 1" Straight Blade
- (2) 265.12.SD 3x12x.083 Side Cutting Bronco Blade
- (1) 266.06.SD 4x6x.083 Side Cutting Bronco Blade
- (1) 266.12.00 4x12x.083 Bronco Blade
- (1) 266.12.SD 4x12x.083 Side Cutting Blade

260B Hybrid Bronco Accessory Pack (260B.90.00)

- (1) 260B.90.10 Owners Manual
- (1) 260.90.02 16mm Socket
- (1) 260B.90.03 Universal Joint
- (1) 260B.90.02 Extension Bar
- (1) 260B.90.01 Ratchet Handle
- (1) 260B.70.14 Cord Boom
- (1) 260.90.03 1-1/8" Wrench
- (1) 165.10.00 3x10x.083 Bronco Blade
- (3) 166.07.00 4x7x1/8" Heavy Duty Tile Blade
- (2) 166.10.00 4x10x1/8" Heavy Duty Tile Blade
- (1) 167.04.00 4x4x1/8" Tool Steel Blade
- (1) 168.01.00 Ceramic, 1" Straight Blade
- (2) 265.12.SD 3x12x.083 Side Cutting Bronco Blade
- (1) 266.12.00 4x12x.083 Bronco Blade
- (1) 266.12.SD 4x12x.083 Side Cutting Blade

FLOOR STRIPPERS

	464R	462, 462A/463	Bronco	Hybrid Bronco
Length*	36"	36"	48"	56"
Width	17"	17"	29"	29"
Height*	33"	32"	44"	53"
Weight w/o Supplemental Weight	114#	95#	640#	N/A
Wt. of Supplemental Wt.	Nose wt. 43# Hood wt. 44# Base wt. 27#	40#	600#	N/A
Shipping wt.	320#	140#	1240#	2050#
Motor Specs.	Drive Motor: 1/4 HP 115V 4.6 amps Blade Motor: 3/4 HP 115V 10.8 amps	Motor: 3/4 HP 115 volts 10.8 amps	7 1/2 HP 220V Single phase 3450 rpm 20 HP Propane 20 lb. Propane tank 8 hr. work time	48 volt DC motor 3600 rpm
Blade Action	2200 strokes per min. back & forth	2200 strokes per min. back & forth	Fixed Blade	Fixed Blade
Blade Stroke	1/4"	1/4"	Fixed Blade	Fixed Blade
Warranty	1 yr.	3 yrs.	1 yr.	1 yr.

* Length and Height dimensions are with handle bar extended
Stripper specifications are approximate

Ceramic Blade and Blade Holder

For removing thinset and mortar from concrete.
(do not use on soft concrete)



Ceramic Blade
#260.40.39
Replaceable, brazed carbide blade.
1 1/2" width



Note: The blade assembly should be inserted in the Bronco blade holder so that the Ceramic blade holder is flush with the Bronco blade holder as shown.

FLOOR STRIPPERS

Sinclair Stripper Compatible Blades

TURBO/EXTRO/SUPER STRIPPER BLADES



#S10.4651T 12" tile blade.
For use on VAT and VCT tile. Prevents tile from jamming in between blade and blade holder. A must for tile removal to protect blade holder.



#10.4652 12" rigid blade.
The standard blade for carpet, vinyl or adhesive removal, precutting of the floor is needed.



#S10.4801 14" flexible blade.
Standard blade for carpet, vinyl, or adhesive removal but slightly flexible for uneven concrete surfaces and some soft foam back carpet.



#S10.4801D 14" self-dicing blade. For use on carpet, rubber or vinyl. A real time saver, no precutting necessary since blade will cut strips with knife edged sides.



#S10.4802 14" rigid blade.
Standard blade for carpet, vinyl, or adhesive removal. Precutting of the floor is needed.



#S10.4803 8" rigid blade



#S10.4807 14" x 5" ceramic/parquet blade. Ideal for removal for ceramic tile, marble, parquet, and other wood floors. Precutting needed for plank floors.

BRAVO/DURO/ECO STRIPPER BLADES



#S10.4903 8" x 5" rigid blade.
Ideal for hard to reach areas such as toe kicks, under radiators, etc. Also used for clean up of small areas of parquet, ceramic, etc.



#S10.4905D 10" self-dicing blade



#S10-4906 8" rigid blade.
Our standard blade for removal of vinyl, carpet, adhesive, etc. Bevel edge of blade should be up for concrete and down for wood sub-surfaces. Pre-cutting of carpet and vinyl needed.



#S10.4907T 8" tile blade.
For use on VAT and VCT tile. Prevents tile from jamming in between blade and blade holder. A must for tile removal to protect blade holder.



#S10.4908 10" flexible blade



#S10.4910 10" vario rigid blade

FLOOR STRIPPERS

DURABLADE with **DYNALLOY**

They're Thicker! They're Stronger! They Last Far Longer!

DURABLES are available in self-dicing(SD) versions to make glue-down carpet removal even faster!



Vinyl Removal

Walk Behind Strippers

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Holes	Slots
				Wood	Cement		
165.04.00	3 x 4 x .083	x		x	x		
165.04.DE	3 x 4 x .083		x	x	x		
165.06.00	3 x 6 x .083	x		x	x		
165.06.DE	3 x 6 x .083		x	x	x		
165.07.00	3 x 7 x .083	x		x	x		
165.07.DE	3 x 7 x .083		x	x	x		
450.SA.13	9 x 1-1/8 x .040	x		x	x		
450.SA.14	5.4 x 1-1/8 x .040	x		x	x		
450.SA.31	5.5 x 4 x .040			x	x	x	
460.15.00	4 x 6 x .062	x		x	x		
460.16.00	5 x 6 x .062	x		x	x		
460.16A.00	3 x 16 x .062	x		x	x		
460.16S.00	3 x 16 x .062	x		x	x		x
460.16S.SD	3 x 16 x .062	x		x	x		x
460.34.00	3 x 10 x .062	x		x	x	x	
460.34S.00	3 x 10 x .062	x		x	x		x
460.70S.00	3 x 7 x .062	x		x	x		x
464.06.00	6 x 6 x .062	x					
464.07.00	6 x 7 x .062	x					

Bronco Ride on Strippers

Propane

Hybrid Bronco

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Holes	Slots
				Wood	Cement		
165.07.00	3 x 7 x .083	x			x		
165.07.DE	3 x 7 x .083		x		x		
165.10.00	3 x 10 x .083	x			x		
165.10.DE	3 x 10 x .083		x		x		
165.12.00	3 x 12 x .083	x			x		x
165.16.00	3 x 16 x .083	x			x		x
165.16.DE	3 x 16 x .083		x		x		x
166.04.00	4 x 4 x .125	x			x		
166.04.DE	4 x 4 x .125		x		x		
166.06.00	4 x 6 x .125	x			x		x
166.07.00	4 x 7 x .125	x			x		x
166.07.DE	4 x 7 x .125		x		x		x
166.10.00	4 x 10 x .125	x			x		x
166.10.DE	4 x 10 x .125		x		x		x
166.12.00	4 x 12 x .125	x			x		x
166.12.DE	4 x 12 x .125		x		x		x

Caution: blades sharpened on both edges are more dangerous. To safely install or remove blades, use Taylor Tools blades with protective edge. Always wear protective gloves to reduce the risk of serious cuts.



FLOOR STRIPPERS

Vinyl Removal

Bronco Ride on Strippers

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Hybrid Bronco
				Wood	Cement	
166.16.00	4 x 16 x .125	x			x	x
166.16.DE	4 x 16 x .125		x		x	x
266.04.00	4 x 4 x .083	x			x	
266.04.DE	4 x 4 x .083		x		x	
266.07.00	4 x 7 x .083	x			x	
266.07.DE	4 x 7 x .083		x		x	
266.12.00	4 x 12 x .083	x			x	x
266.16.00	4 x 16 x .083	x			x	x
266.16.DE	4 x 16 x .083		x		x	x

Carpet Removal (Self Dicing Blades)

Walk Behind Strippers

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Holes	Slots
				Wood	Cement		
460.34.SD	3 x 10 x .062	x		x	x	x	
460.34S.SD	3 x 10 x .062	x		x	x		x
460.70S.SD	3 x 7 x .062	x		x	x		x
464.06.SD	6 x 6 x .062	x					

Bronco Ride on Strippers

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Hybrid Bronco
				Wood	Cement	
165.07.SD	3 x 7 x .083	x			x	
165.10.SD	3 x 10 x .083	x			x	
165.16.SD	3 x 16 x .083	x			x	
165.16.SD.DE	3 x 16 x .083		x		x	
265.12.SD	3 x 12 x .083	x			x	x
265.12.SD.DE	3 x 12 x .083		x		x	x
266.06.SD	4 x 6 x .083	x			x	
266.07.SD	4 x 7 x .083	x			x	
266.09.SD	4 x 9 x .083	x			x	
266.12.SD	4 x 12 x .083	x			x	x
266.12.SD.DE	4 x 12 x .083		x		x	x
266.14.SD	4 x 14 x .083	x			x	x
266.14.SD.DE	4 x 14 x .083		x		x	x

Ceramic/Hardwood Removal

Bronco Ride on Strippers

Part#	Dimensions	Single Edge	Double Edge	Floor Surface		Hybrid Bronco
				Wood	Cement	
167.04.00	4 x 4 x .125 Tool St.	x			x	
167.04.DE	4 x 4 x .125 Tool St.		x		x	
167.07.00	4 x 7 x .125 Tool St.	x			x	x
167.07.DE	4 x 7 x .125 Tool St.		x		x	x
167.10.00	4 x 10 x .125 Tool St.	x			x	x
167.12.00	4 x 12 x .125 Tool St.	x			x	x
168.01.00	1 x 4 x .250	x			x	x
168.04.00	4 x 4 x .250	x			x	x
168.04.DE	4 x 4 x .250	x	x		x	x

Caution: blades sharpened on both edges are more dangerous. To safely install or remove blades, use Taylor Tools blades with protective edge. Always wear protective gloves to reduce the risk of serious cuts.

The MMS2 Flooring Kit

Unrivalled Moisture Testing for Concrete Floor Slabs

Introducing the Protimeter MMS2 Flooring kit. A multi function moisture meter with the most innovative humidity sleeves system available.

The new Protimeter MMS2 Flooring kit has been developed to meet the ASTM F2170 standard for in situ humidity test in concrete. Included is the multi-function Protimeter MMS2 that also allows rapid evaluation of the slabs moisture level.

Features

- Pin moisture measurement.
- Noninvasive moisture measurement.
- Ambient relative humidity and temperature measurement.
- Equilibrium humidity measurement in concrete floors.
- Psychrometric calculations.
- Laser pointer surface non-contact temperature measurement.
- Data logging.
- Firmware upgradable.

Benefits

Reusable Probes:

- Mini Hygrostick probes are reusable up to 5 years, as long as the calibration checks are within specification, making this the most cost effective system available.
- Unlike other low cost humidity systems for concrete floors, Protimeter designed its own sensor element specifically for high moisture, harsh environments found in concrete. The result is more accurate and repeatable readings with lower calibration drift over time.
- Probes install below the floor surface so there is less likelihood of damage.

Adjustable Sleeves:

- Patent Pending adjustable sleeves allow the user to make measurements in 4" to 6" concrete slabs. Dial in the necessary sleeve length without having to cut them to length.

Meter with Simple User Interface:

- New meter that also has a built in infra-red surface temperature reader.
- Built in humidity sensor for ambient temperature and moisture readings.
- Kit comes with 20 sleeves and 5 probes.



Measurements Include:

- In situ relative humidity and temperature - required for ASTM F2170 standard.
- Relative humidity and temperature in the ambient conditions - required for ASTM F2170 standard.
- Surface temperature - required for ASTM F2170 standard.
- Noninvasive instant moisture evaluation used prior to in situ RH moisture test.
- Pin type moisture measurement, evaluating wood floor materials.
- Data logging.

The Digital Mini

#P5702

Tough, accurate, easy-to-use.

Portable and precise pin type moisture meter features both color LED indication and large digital display allowing building professionals—such as flood damage restoration contractors, surveyors, homebuilders and architects—to assess building moisture levels during new build and refurbishing activities. Easily identify the extent of the moisture penetration, diagnose the cause of the problem and monitor changes in moisture level. The ability to add optional attachments and a patent pending reference mode enables you to compare your reading with a baseline measurement.

Features

- Rugged construction
- Large backlit display
- Pin moisture measurement
- Wide range of accessory plugins
- Industry leading 2-year warranty

The Surveymaster

#P5365

The world's best just got better.

Introducing the Protimeter Surveymaster, one of the world's first and best-selling dual-function moisture meters.

This versatile pin and non-invasive meter is ergonomically designed for easy, one-handed operation to measure moisture in buildings and other related structures both on and below the surface to assess moisture levels for new or refurbishing activities and diagnose moisture-related problems in existing buildings. Two-year warranty.

Features

- Rugged construction
- Large backlit display
- Pin moisture measurement
- Non-invasive measurement up to $\frac{3}{4}$ " (20mm) below the surface
- Wide range of accessory plugins
- Industry leading 2-year warranty

The Aquant Surface Meter

#P5760

The right moisture meter makes all the difference when surveying, cleaning or restoring a property after water damage! The Protimeter Aquant (non-invasive) is the sister product to the Surveymaster and helps you locate moisture quickly in a wide range of materials with a RF measurement system unique to the Protimeter. This system allows you to detect moisture up to $\frac{3}{4}$ " (20mm) below and behind the surface in the most efficient way possible.

Features:

- Rugged construction
- Large backlit display
- Non-invasive measurement up to $\frac{3}{4}$ " (20mm) below the surface
- Industry leading 2-year warranty





For Moisture Detection, Measurement and Testing in the Flooring Industry

- Detect if there is continuous moisture migration toward the surface
- Test surface and mid-section of concrete slabs
- Reduce chances of excess moisture in wood floors and subfloors
- Identify potential for delamination in synthetic floors

TotalCheck 3 in 1 Meter #DI-2000

Offers scan and pin moisture modes as well as a thermo-hygrometer that measures ambient temperature and relative humidity (RH) and calculates dew point and specific humidity (GPP). Relative humidity is a crucial factor to consider when installing a floor over a concrete subfloor. The RH sensor of TotalCheck is removable and conforms to the ASTM F-2170 standard to determine if concrete floors have dried adequately before installing a floor covering.

Pin Mode:

- 5%-60% MC wood scale
- Corrects for 69 individual wood species from 5%-60%
- Corrects for temp. from 0°-255°F
- 0.1%-6% sheetrock scale
- 0-100 numerical reference scale for non-wood building materials

Scan Mode:

- 0-300 numerical reference scale

Thermo-Hygrometer with RH Sensor

- Measures temp. from -4°-158°F
- Measures RH from 0-100%
- Calculates dew point
- Calculates specific humidity

General Features:

- Connector for external electrodes
- On-screen reading recall of up to 1400 stored readings
- Date and time stamp for each stored reading
- Job groupings
- Infrared linking to PC or laptop
- Application software - generate reports and manage data
- Includes 9V battery, 1-year warranty, carrying case



Kit Contents

Description	Cat. No.	Qty.
PC Kit	DI.2050	1 ea.
TotalCheck Meter	DI.2000	1 ea.
Sleeves*	DI.2200.20	10 ea.
Humidity Probe** (sensor)	DI.2500.05	1 ea.
2-Pin Electrode	DI.2E	1 ea.
Humidity Probe Cable	DI.2500.RHC	1ea.
Calibration Salts	DI.SALT.75	1ea.
Cleaning Brush	DI.473175	1ea.
Vacuum Nozzle	VAC.160.06	1ea.
Drill Bit (5/8")	DI.625.DRILL	1ea.

*Sleeves are sold 20 per pack

** Probes are sold 5 per pack



Relative Humidity Test

In-Situ Probe for ASTM-2170
Moisture Detection, Measurement
and Testing

BD-2100

MOISTURE METER

#DI.2100

- Digital readout
- Three scales:
- Wood Scale - 6%-40% moisture range. Use for flooring and building material such as wood studs, floor joists, subfloors
- Reference Scale - reads from 0 to 100 on a relative basis. Use on non-wood materials such as concrete, plaster and insulation
- Gypsum Scale - 0.2%-50% moisture range. Use on sheetrock
- Averages up to 100 accumulated readings
- Set-point alerts you to when a pre-selected MC is reached
- Connector to attach any available electrode for deep penetration
- One year warranty



J-Lite

MOISTURE METER

#DI.500

- Microcontroller circuit for increased reliability
- Integral contact pins mounted on the meter provide 5/16" penetration
- 12 bright LEDs for reading in direct sunlight or dark areas
- Moisture Content range from 6%-30%
- Connector for external electrode
- Industry's only 3 year warranty
- Includes 9V battery and carrying case



J-2000

Wood Moisture Meter with Case

#DI.J2000

J2000 with Hammer Probe

#DI.J2000HP

- The most versatile wood moisture meter on the market
- Micro controller circuit
- Corrects for 48 individual species and temperature (°F and °C)
- Averages up to 100 accumulated readings
- Measures moisture content over the range of 6% to 40%
- Connector to attach external electrode
- Rugged carrying case



TECHSCAN

Surface Meter

#DI.TECHSCAN

- Intuitive user interface
- Easy-to-read analog display
- Species correction chart
- Built in calibration/battery checks
- Auto shut-off timer saves battery life
- Audible, adjustable alarm alerts you when your pre-selected moisture content has been reached
- Moisture reading hold button freezes screen for future viewing
- Two Scales:
Wood Scale: 5% - 30% moisture range
Reference Scale: Reads from 0 -100 on a relative basis for use on non-wood materials
- Size: 5-5/8" x 3-5/16" x 1-1/4"
- Weight: 8.5 oz.
- Rugged construction ensures years of reliable use
- Sturdy plastic carrying case
- 9V battery
- 1-year warranty



Humidity / Temperature Pen #625.HT

Measures both ambient humidity and ambient temperature in one instrument. Ambient humidity and temperature readings are required information when testing for moisture in concrete slabs, (calcium chloride or relative humidity testing).



pH Meter #PH.100

Make quick, precise pH readings of concrete and carpet surfaces with the PH.100's surface contact probe.

Note: The PH.100 does not accommodate the PH.500 extension cable.



Calibration Solutions for pH Meter

Solution	Part No.
Rinse	#625.06.PK
pH 4.01	#625.06.04
pH 7.00	#625.06.07
pH 10.00	#625.06.10




Accurate results require testing the **moisture content** of the concrete and the **rate of moisture emissions**. See our website taylortools.com for details.

Calcium Chloride Moisture Test Kits #625

- A must for every installer
- Inexpensive and easy to use
- The most accurate, widely accepted quantitative method on the market today
- Your best insurance against liability for installation failures due to moisture
- Includes temperature indicator

First developed by the Rubber Manufacturers Assn. Inc., the Calcium Chloride Moisture Test Kit accurately measures the amount of moisture (in lbs.) coming through the slab over a 1000 sq. ft. area during a 24 hr. period. For many manufacturers of flooring materials, it is the only acceptable method of testing for moisture. Very inexpensive. Price includes test and archival service. Weighs 1 lb.

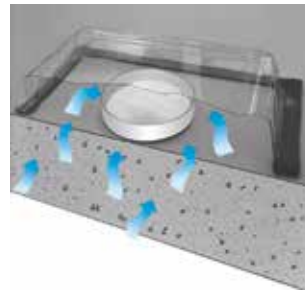

#625.00.POP

Budget-priced version of the #625 Calcium Chloride Moisture Test Kit, specifically packaged for display sales.



#625.POP.VP

Lowest priced kit. Includes 3 calcium chloride tests and two pH tests.



#625.B

The most economical way to buy CaCl test kits. Each box includes 50 domes and test dishes, 1 ea. instruction sheet and log sheet.





Moisture Test Kit Gram Scale

#626

Use to confirm your pre-weight and weigh the Calcium Chloride after exposure. Then do the calculations and send the sample back for free confirmation documentation and archival service of your test.


Mini Precision Balance

#626.MPB

This highly accurate gram scale is now available from your authorized Taylor Tools distributor for less than \$60.

Small enough to fit in your pocket, the Mini Precision Balance lets you quickly and easily perform your own Calcium Chloride moisture tests without waiting for mailed results.

The #626.MPB is fully compliant with ASTM-F-1869 and features a protective cover and a super-bright backlit LCD display which retracts into the instrument for increased protection and portability.

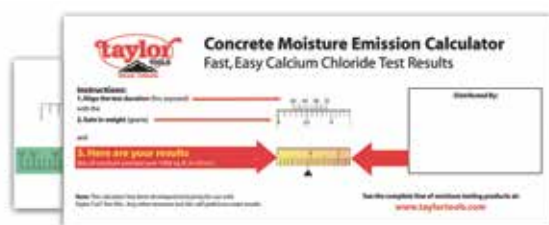


Pocket Calculator

#625.CALC

Do you want to do your own moisture calculations but HATE MATH?

Ask your Taylor Tools distributor for one of our handy 625.CALC pocket calculators.

Just line up the test duration with the gain in weight and you'll instantly see your results.

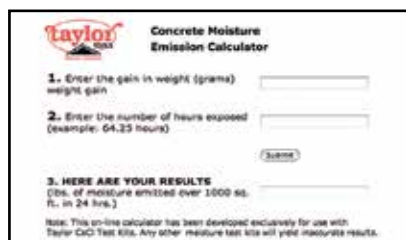

Taylor Tools Concrete Moisture Emission Calculator

1. Enter the gain in weight (grams)

2. Enter the number of hours exposed (example: 64.25 hours)

3. HERE ARE YOUR RESULTS
(lbs. of moisture emitted over 1000 sq. ft. in 24 hrs.)

Note: This on-line calculator has been developed exclusively for use with Taylor Tools Moisture Test Kits. Any other moisture test kit will yield inaccurate results.



Try our fast, accurate online calculator at taylortools.com/calculator.html




Concrete Thickness Gauge CTG.2A


Measure the thickness of concrete slabs...
...the fast, easy, and accurate way

- **ACCURATE** - up to 2% of slab thickness.
- **NON-DESTRUCTIVE CONCRETE SLAB THICKNESS** - (Calibration may require coring of the slab)
- **FAST** - Get accurate results in 3 seconds or less. Read and compile results on a Windows-based laptop or tablet.
- **VERSATILE** - Measure concrete from 3.6 inches to 20" thick - Download results to your PC spreadsheet.
- **EASY-TO-USE** - A learning curve of less than 10 minutes.
- **PORTABLE** - Hand-held, battery-powered portability.
- **10 YEAR BATTERY LIFE**


8" tablet (#CTG.ACER) sold separately

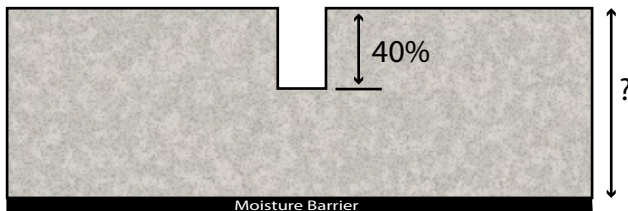

ASTM F-2170 insists that Relative Humidity readings **MUST** be taken at 40% of the thickness of the concrete slab to be tested. So, just how thick IS the slab?

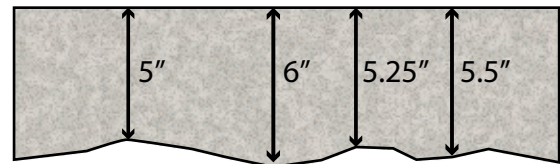

And what if the slab thickness is inconsistent?

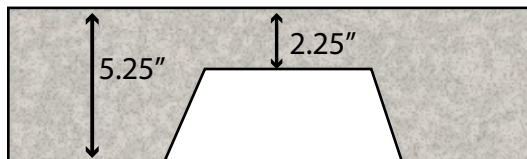

Or, if you're testing an elevated slab - is the test hole over a peak or a valley in the underlying corrugated pan?

These variations in slab thickness can compromise the accuracy of your RH test results.

But with the new CTG.2A Concrete Thickness Gauge from Taylor Tools you can rest assured that you'll be getting fast, accurate measurements. The CTG.2A system saves time, money and provides accurate results.



Uni-Lift #600

The Uni-Lift turns any heavy object into an easy-to-move 4-wheeled cart without balancing or tipping. Strap a pair of Uni-Lifts onto a heavy object, push the lifting lever, and one person (man or woman) can easily move desks, appliances, machinery...up to 800 lbs. Featuring the patented Sta-Tite belt tightener, large 3" casters and rubber bumper guards, the Uni-Lift quickly and efficiently solves your heavy lifting and bulky moving problems. Comes with attached 1 ft. strap w/buckle and 11 ft. strap w/o buckle plus an extra 7 ft. strap w/buckle.

Specifications:

Height: 28"

Width: 22"

Weight: (pair) 45 lbs.

Lifting Capacity: 800 lbs

Not to be used on stairs or steps

The Uni-Lift is used by:

Movers, Floor Covering Installers,
Carpet Cleaners, Warehousemen,
Plant Operators, Office Managers...

To Move: Furniture, Store Displays,
Air Conditioners, Machinery, Appliances,
Office Equipment, Crates, etc.





The Mule

#505

The Mule is more compact, lighter and more maneuverable than other carts and it costs less. Yet, it can carry 1,000 lbs., can be hand carried and is easily stored because of its compact size.

Specifications:

Carrying Capacity: 1000 lbs.

Weight: 39 lbs.

Length: 39 1/2"

Height: 18 3/4"

Width: 21"

Tires: 16" pneumatic

Construction: All-steel

Can be shipped by UPS



No-Flat Tire

#500.03.NF

Install on your Carpet Cart or Mule Cart and eliminate flat tires forever! Same Load Rating as standard pneumatic tires.

Carpet Cart

#500

Large 16" pneumatic tires and a heavy gauge tubular steel frame provide a 1,000 lb. capacity for easy carpet and padding handling.

Specifications:

Carrying Capacity: 1000 lbs.

Weight: 55 lbs.

Length: 5'

Height: 22"

Width: 20"

Tires: 16" pneumatic

Construction: All-steel

Can not be shipped by UPS



CARPET INSTALLATION



Deluxe Knee Kicker #825

The #825 Deluxe Knee Kicker features the widest head, the largest bumper pad and one of the longest extensions of any kicker on the market. This combination allows you to move 1/3 more carpet with every kick. The rubber bumper and hand grip also make the #825 Kicker the most comfortable one to use.

But the biggest advantage this kicker has is the unique, hardened stainless steel saw tooth blades which let you really bite into the carpet and at the same time prevent the kicker from clogging up with yarn fibers and scuffing the carpet face like wornout staple nap grips.



What'll it be. . . Hardened steel Sharkteeth blades or flimsy wire staples?



#800.15

The overwhelming success of the stainless steel tooth plate on our #825 Deluxe Knee Kicker led to the development of SHARKTEETH. These hardened stainless steel blades replace wimpy wire staples on any single screw nap grips. 5 times longer lasting, the long pins penetrate deep into pile to positively grab all carpet types.



Roberts knee kicker.



The #800.15C version of Sharkteeth is made to fit the Crain #600 knee kicker.

Stretcher Hook now with Pressure Limiter #737

The popular #737 Taylor Stretcher Hook is now better than ever. An internal spring gives under extreme pressure to reduce the chance of broken prongs. A set screw in the base allows installers to adjust the release pressure.

This innovative, lightweight (1.5 lb.) tool stretches from the floor, not from the wall, so you can eliminate tubes, tailblock assembly and carrying cases. All you need is the #737 Stretcher Hook and stretcher head (adapter tube necessary with Taylor stretcher #748).



Caution: This tool can only be used on carpets that have the manufacturer's approval. This tool will damage the floor surface under the carpet. Installers should not use on hardwood floors.



Kicker Pick/Row Tracker Two Useful Tools In One! #800.16

One end of this unique tool has a series of blades specially designed for fast, easy cleaning of your stretcher and kicker heads including Sharkteeth. The other end traces factory rows on a wide variety of carpet styles.



Adjustable Row Tracker/Kicker Pick II #800.17

Adapt this versatile new version of our popular row tracker for any type of carpet. The tip can be adjusted to give various degrees of row spreading. The other end contains blades for fast, easy cleaning of stretchers and kicker heads. Private label available with quantity purchases. Call for pricing.



Blunt Setting



Pointed Setting

CARPET INSTALLATION

1-Step SEAM SEALING & SEAMING Much Easier and Faster Than a Glue Gun Tip!

Throw that glue bottle away and meet the future of carpet seaming. The patented 1-Step Seam Sealing and Seaming System from Taylor Tools not only drastically reduces installation time, it results in a better, stronger seam.

The 1-Step Seaming Iron's unique welding head applies a precise amount of hot melt adhesive to the carpet seam edges, locking in the face yarns while simultaneously welding the seam together.

The result? A joint that is actually stronger than the rest of the carpet with a seam that will remain flat even after stretching with virtually no seam peaking.

Instruction in the proper procedure is required for optimum results. Call, write or visit the Taylor Tools website for more information.

**Taylor #893
Seam Weld Iron**


Slashes Installation Time!

Traditional Method





1. Apply a bead of seam sealer to one edge of carpet
2. Apply a bead of seam sealer to the other edge
3. Wait for sealer to dry
4. Seam the carpet

The 1-Step Seam-Weld Method




1. Seam-Weld the carpet

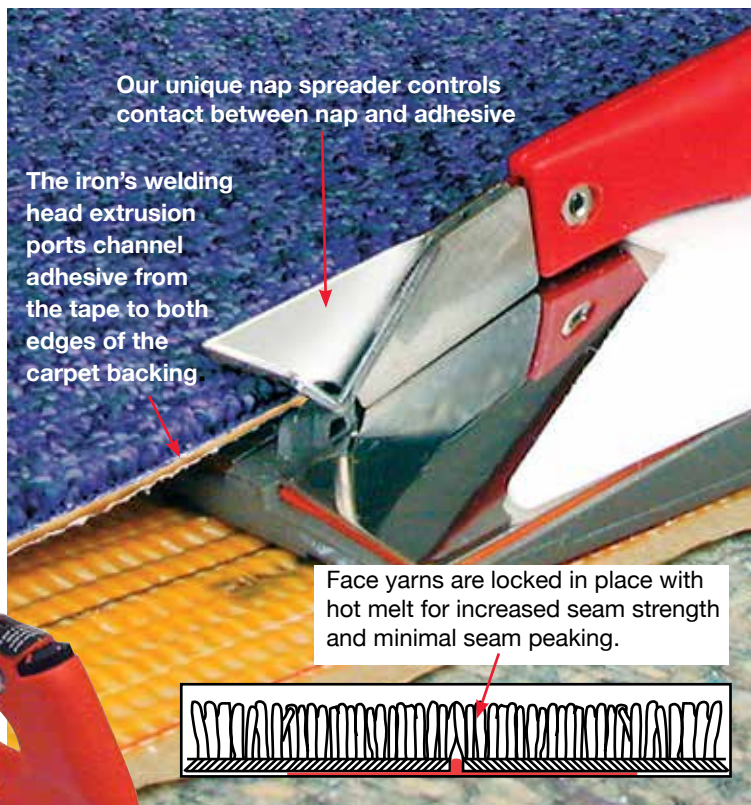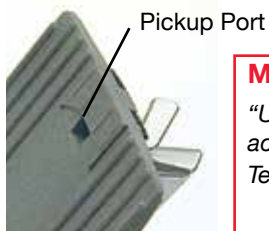

Our unique nap spreader controls contact between nap and adhesive

The iron's welding head extrusion ports channel adhesive from the tape to both edges of the carpet backing

Face yarns are locked in place with hot melt for increased seam strength and minimal seam peaking.

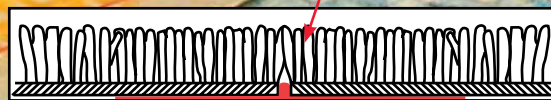

You Can't Make a Stronger Seam!

- Minimizes handling
- Provides a perfect, lay-flat, no-peak seam . . . every time!
- Actually fortifies the seam - now the seam is the strongest part of the carpet
- Ideal for restoration

Major mills prefer 1-Step for making and sealing seams...

"Using the Taylor #893 Seam Weld iron with a trained installer in accordance with the new CRI-105 standard for installation, Shaw Technical Services feels this is an acceptable way to seal carpet seams."

James Mullins
Technical Services Installation Manager
Shaw Industries, Inc.



"Mohawk Technical Services has found the Taylor 893 Seam Weld iron to be an effective way to make and seal seams when used by a trained installer in compliance with CRI-105."

Jack Earwood
Installation Manager
Mohawk Industries, Inc.



CARPET INSTALLATION


Taylor Seaming Irons

Many of the features on our #893 Tru-Trak Seam Welding Iron have proven so popular that we've incorporated them into our standard irons. Now the best conventional irons on the market are better than ever!



#893.05 Nap Spreader

allows you to inspect the alignment of the carpet backing as you're making the seam.

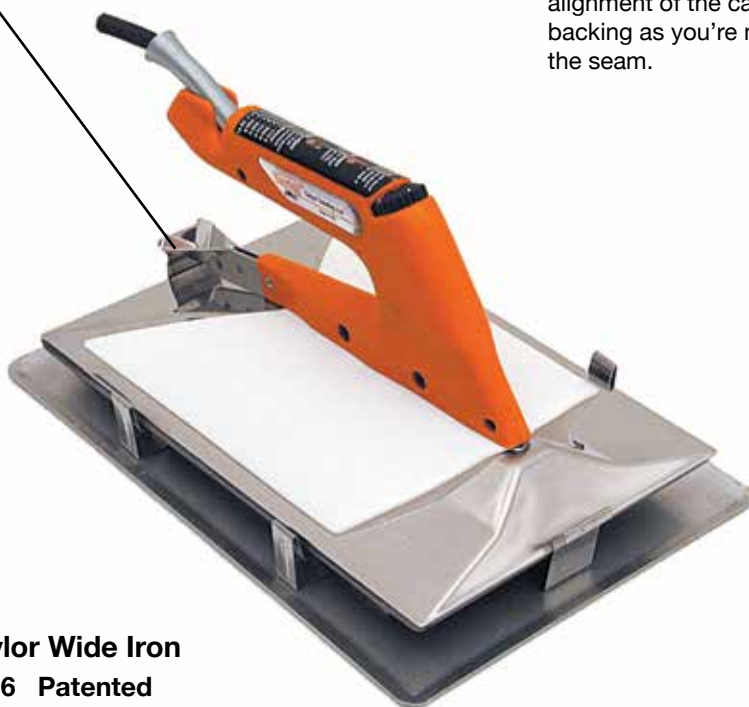

Taylor Wide Iron

#896 Patented

- Includes all the same great features as the #890 iron - but it's 6" wide!
- Wafer thin base and shield design reduces profile under carpet (it just seems to disappear)

Taylor Iron

#890 Patented

All Taylor Premium Seaming Irons include a powerful, new 900 watt heating element and a 24' cord.

- An important safety feature - Red light means: "Caution, power on, iron is hot!" Green indicates: "Selected temperature has been reached"
- Temperature control knob on top of handle for easy adjustment.
- Super cool handle features unique setback design for easy seaming under toe kicks. (The new handle is also available as a replacement part.)

Which setting? Now you know!

Now all Taylor premium irons include a valuable handle label that tells you how hot your settings are - so if the carpet manufacturer recommends a certain heat, you'll know exactly which setting to use.



Additional features:

- Patented Teflon Carpet Guard System prevents distortion of Action Bac!
- Exclusive #890 heating area pre-heats carpet backing!
- Super slick, super tough base coating!
- Includes heavy duty iron tray with reinforced iron rests and 24' cord!
- 2 year warranty

Conventional Seaming Irons

#790 Iron

#796 Wide Iron

Now you can get a quality iron at a budget price. These irons include such features as a 900 Watt heavy-duty heating element for fast heat-up, a 5-setting thermostat and a fully grooved base. Both irons come with a heavy-duty iron tray, a 12' power cord (also available with a 24' cord) and a 90 day limited warranty.



#888

#889

Carpet Seam Rollers

Rolling the spiked wheels of the Seam Roller over heat bond seams increases the transfer of the hot melt adhesive to the carpet backing thereby improving the strength of the seam. This action also enhances the appearance of the carpet at the seam. For use on loop pile carpets.

Smooth Seam Rollers

New smooth roller surface is now required for plush carpets. Won't leave tractor marks. Can be used on all carpet styles.

#888 4" Seam Roller

#889 6" Seam Roller

#888S 4" Smooth Seam Roller

#889S 6" Smooth Seam Roller



#889S

#888S

CARPET INSTALLATION

Now you can have any of the Taylor Tools Irons with a lighted handle.

(Just add an "L" to the end of the part #)



New Light On Seaming!

The Nap Light option for all Taylor Tools seaming irons helps prevent seaming errors by providing illumination to the most critical area of the seaming operation.

This combination of floodlight and spotlight built into the handle is powered by the iron's 110V AC current and automatically lights up when the iron is plugged in.

Ideal for closets and other poorly lit work areas, the Nap Light lets you clearly see the smallest details. Check out the Nap Light feature at your local Taylor Tools distributor today!



Universal Teflon® Carpet Guards #325, #326

The most effective way to properly reduce excessive heat reaching the carpet backing. Fits most irons sold today.

If you can't touch the top of your iron without burning your fingers, can it really be safe enough for those heat sensitive carpet backings?

CARPET INSTALLATION

Iron Replacement Parts of our Manufacture to Fit Taylor, Roberts* and Orcon* Irons

*Roberts is a registered trademark of Roberts Q.E.P. O'Tool with whom we are not affiliated.

*Orcon is a registered trademark of Orcon Corporation with whom we are not affiliated.



890.15.00

Portage Unit Assembly

Pkg: 1 ea.

For Orcon irons, std. & wide.



890.07.00

Wire Harness w/Resistor Light & Ground Wire

Pkg: 1 set

For Roberts 182 style iron, standard & wide.



893.02.00

890/893

Wire Harness Fused

Pkg: 1 ea.

For Taylor 893, 890, 896



890.06.00

Plain Thermostat Fuse

Pkg: 5

For all Taylor & Roberts irons.



890.47.00

Wire Harness w/Resistor Light

Pkg: 1 ea.

For Taylor 790, 796 & Orcon irons.



890.46.00

Wire Harness Fused

Pkg: 1 ea.

For 790 & 796



890.05.00

Wire Harness Fused

Pkg: 1 ea.

For Roberts 182 style irons, std & wide.



890.24.00

24' Power Cord w/Connectors

Pkg: 1 ea.

For Taylor & Orcon irons.



890.12.00

12' Power Cord w/Connectors

Pkg: 1 ea.

For Taylor & Orcon irons.



890.22.00

12' Power Cord w/Terminal Block & Cord Spring

Pkg: 1 ea.

For Roberts 182 style irons.



890.03.00

Heat Element Cover

Pkg: 1 ea.

For Taylor & Orcon std. width irons.



890.09.00

Heat Shield w/Fasteners

Pkg: 1 ea.

For Roberts 182 style, Orcon standard width irons.



890.19.00

Heat Element: 110 V, 1050 W

Pkg: 1 ea. For Taylor wide irons, Roberts 286 style, Orcon wide irons. Use on wide irons only.



890.02.00

Heat Element 110 V, 900 W.

Pkg: 1 ea.

For Taylor 4" irons, Roberts 182 style & Orcon std. width irons.



890.04.00

Thermostat w/Fasteners

Pkg: 1 ea. For Taylor irons, Roberts 182 style & Orcon irons. Std. & wide irons.

CARPET INSTALLATION



890.08.00
Heat Shield Gasket
Pkg: 1 set
For Taylor 790, Orcon irons.



890.18.00
Wide Heat Shield Gasket
Pkg: 1 set
For Taylor 796, Roberts 286 & Orcon wide irons.



890.16.00
Handle Gasket
Pkg: 1 ea. For Taylor 790, 796, Roberts 182 style & Orcon irons, std. & wide.



893.03.00
Heat Shield "O" Ring Gasket
Pkg: 1 ea.
For Seam Weld 893 & 890.



890.14.00
Standard Width Iron Tray
Pkg: 1 ea.
For Taylor 890, Roberts & Orcon standard width irons.



890.17.00
Wide Iron Tray
Pkg: 1 ea.
For Taylor 896, Orcon & Roberts wide irons



896.03.00
Wide Carpet Guard
Pkg. 1 ea.
For Taylor 896, Roberts 182



890.10.00
Carpet Guard
Pkg: 1 ea.
For 890, 893



893.05.00
890/893 Nap Spreader
w/Screws & Spring.
Pkg: 1 set. For Taylor 890, 893 & 896



893.04.00 890/893 Handle Set w/Fasteners
Pkg: 1 set. Specify Red for 893, Orange for 890 & 896.



890.11.00
Universal Handle Set w/Fasteners
Pkg: 1 set. For Taylor 790, 796, Roberts 182 style & Orcon irons. Std & wide irons.



890.20.00
Universal Fastener Kit
Pkg: 1 set
For Roberts 182 style iron, std. & wide.



893.06.00
890/893 Temperature Control Assembly
Pkg: 1 set. For 893, 890, 896.



890.13.00
Temperature Control Knob
Pkg: 1 set (includes 1 knob, 1 extension). For Taylor 790, 796, Roberts 182 Style & Orcon irons. Std. & wide irons.

Conventional Trimmer

#716

An improved version of the traditional style carpet trimmer popular with installers. The #716 Trimmer features a non-slip handle grip and a blade stop guide assembly that prevents blade movement during cutting action. The #716 comes with a Delrin guide to prevent marring of base boards and all parts are interchangeable with Roberts #10-616 Trimmer. Comes with a ONE YEAR WARRANTY.



Multi Purpose Wall Trimmer

#715

Make faster, cleaner cuts without marking walls. Use hooked blades for carpet tiles, slotted blades for regular carpet or vinyl sheet goods. Anti-friction boot snaps on to glide smoothly over sheet goods. Adjusts for most material thicknesses, lays flat for clean, precise cutting under toe-kicks.

Top Cut Cushion Back Cutter

#998

Adjustable blade cuts any thickness of cushion-back and conventional carpet. Close-cutting on either side with two lockable blades.



Loop Pile Cutter

#999

Cuts virtually any thickness of loop pile. Throat opening automatically adjusts for different carpet backs. Handle attached to support base provides increased leverage, easier guiding and cutting. Two-blade design allows left or right blade operation, better cutting angle, easier blade insertion.

CARPET INSTALLATION

E-Z TUCK

#807

Get rid of your other tucking tools and install carpet 20% faster with the versatile E-Z Tuck.

- Tuck "Z" Bar and metal borders - even heavy berbers!
- Set carpet on tack strip - works great with power stretchers!
- Creases carpet for trimming and tucks carpet smoothly against the wall!
- Goes hand-in-hand with kickers!
- Faster and easier than stair tool for stairs!
- Ideal for glue-down!



Deluxe E-Z TUCK

#808

For faster installation and a longer tool life, the Deluxe E-Z Tuck has a permanently lubricated bearing which creates a smoother action and eliminates wear on the wheel.



Repair Kit #808.01



Repair Kit #807.01


Concrete Nail Driver

#870

Sink concrete nails with a single blow from a standing position with the incredible #870 concrete nail driver.

No misses and no damage to walls resulting from misses because the outer tube (sleeve) guides the inner tube or mallet in the striking sequence - saves fingers and base boards.

The Driver also features a replaceable magnetized tip for locating and holding loose nails and a convenient handle for installation flexibility.

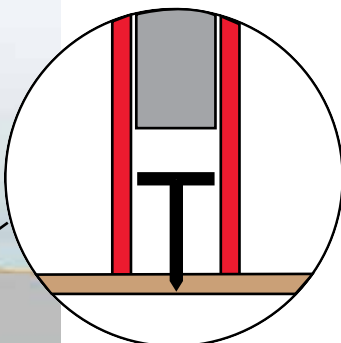


Specifications

All Steel Construction
Weight: 12 lbs.
Length: 47"

No more stooping or bending over to locate loose nails. Simply use the magnetized head.

replaceable magnetized tip
#870.01

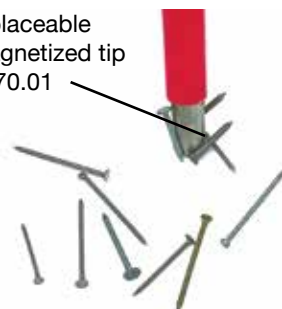

TRIPLE TAC

#333

The distributor doesn't have your staples in stock? No problem. The heavy duty TripleTac is the only tool on the market that can accommodate a choice of staples. The TripleTac's ergonomic handle and jam-resistant design make pad installation a breeze.

Shoots Your Choice of Staples!

5000 staples/box 20 boxes/case

7512: 15/32" crown, 19 gauge

333.7512 Chisel Point

333.7512D Divergent Point



5010: 1/2" crown, 20 gauge

333.5010C Chisel Point

333.5010D Divergent Point



A11: 3/8" crown, 20 gauge

333.A11 Divergent Point

333.A11C Chisel Point



Jam-Resistant Technology!

Chances are you'll never have a jam. But if you do, simply remove the screw from the end of the handle and the TripleTac swivels open for easy access.



Shock-Absorbent Grip!

"The most comfortable grip of any hammer tacker on the market!"



This is the HOT one! 1000° F Heat Gun

#885

Adjustable air intake regulator provides temperatures from 500°F to 1000°F. Replaceable brushes and Quick Change heating element extends life and eases servicing. Weight: 2 3/4 lbs. including stand. 115V, 15 amp., 27 cu. ft./min air flow.

CARPET INSTALLATION



Power indicator light lets you know gun is on and hot

"Cool Tip" Glue Gun

#886

60 watts of power. Provides fast, easy seam sealing and carpet repair. Special cool tip on gun protects carpet fibers from heat.

Glue Sticks

#887.01 4" Glue Sticks (30/bag)

#887.10 10" Glue Sticks (12/bag)

Also available in 25 lb. boxes

Special Taylor formula minimizes fiber and backing distortion. Anti-oxidants reduce degradation, yellowing and hardening from U.V. exposure. Includes a fluorescent material that reflects "black" light for easy seam inspection. Fits all 1/2" glue guns.



Carpet Repair Tips

- Fits Taylor and other glue guns!
- Heavy copper alloy construction heats up fast - stays hot!
- Needle nose design penetrates the deepest pile!




#886.05 Micro Repair Tip



#886.06 High Flow Repair

Carpet Piercing Tip

- High strength steel pierces carpet backing

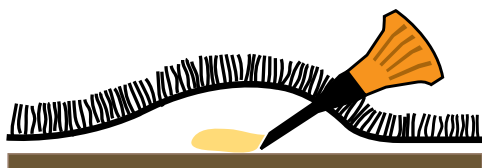

#886.093.CP Carpet Piercing Tip

CARPET INSTALLATION



Hammer

#438

20 oz. Rip Hammer, smooth face, drop forged, 14" wood handle, superb balance, comfortable grip, a favorite of tradesmen, made in the USA.

Flooring Hatchet

#431

30 oz. Flooring Hatchet, large smooth face, drop forged, 3 1/2" inch blade, triple wedged 14" inch hickory handle, made in the USA.



Super Bar

#819

Vaughan's Original Superbar, "Shepherd's Crook" rocker head design, forged and tempered spring steel for heavy duty use, 15" length for excellent leverage, polished sharp blades, made in the USA.



Mini Flush Cut Saw

#425

Mini- Double edge flush cut pull stroke saw, fine cut /extra fine cut 5 1/2" blade, extra thin blade perfect for flush cutting, triple edge blade teeth, impulse hardened.



Double Edge Saw

#420

Double edge pull stroke saw, medium rip cut / extra fine crosscut 10" inch blade, triple edge blade teeth, impulse hardened, the thin blade is flexible and bends easily to make smooth flush cuts, perfect for trimming door jams, molding and installing flooring.

CARPET INSTALLATION



Flooring Nailer Mallet

#435

32 oz. Flooring Nailer Mallet , replaceable, non-marring 2" diameter rubber tip, tapered striking end, triple wedged 15" hickory handle, made in the USA.

Mallet

#437

20 oz. White 2 1/4" inch face diameter, quality rubber for high impact strength and long life, head securely mounted to hardwood handle, made in the USA.



WOOD INSTALLATION



Power Shunting Device

#375.03

For fast, efficient installation of parquet, laminate, cork, melamine and hardwood. Combines shunting and hammering. No damage to tongue and groove. Includes new swivel head.

CARPET INSTALLATION



#816

#814

#812

#813



#815



#M.20.060

Tool Pouches

All our tool pouches are made of top quality grain leather and are constructed to withstand rugged use day in and day out.

#816

Knife pouch

#812

Box with pocket flap.

#813

Flared shape, single pocket pouch with pocket flap. 4 1/2" x 7 1/2" overall size.

#814

Same as #813 without pocket flap.

#815

Five (5) pocket box shape pouch features one large main pocket plus two smaller pockets. Also has two (2) tapered holders. 6 1/2" x 7" x 1 1/2" overall size.

#M.20.060

Mozart Trimmer pouch.

18" Broom with Handle

#315

Polystyrene bristles with split tips give our brush and broom better sweep action, more durability, better fiber bend recovery and at a far lower cost than horsehair models.

The broom comes with a 5' wooden handle and support hardware. The bristles are 3" long with a brush face of 18" set in a clear lacquer hardwood block.

24" Broom with Handle

#314

For those who like a wider sweeping action. Features 3" flagged plastic bristles set in clear lacquer hardwood block. Comes with 5' wooden handle. Weighs 3 lbs.



#315

#314



Counter Brush

#310

Brush bristle length is 2 5/8" long with a 9" face set in a clear lacquer hardwood block.

CARPET INSTALLATION



Carpet Installation Kit

#880

Complete kit of the most frequently used tools for carpet installation. Costs less than purchasing tools individually.

Includes 1 each of the following tools:

#999	Loop Pile Cutter
#800.17	Adjustable Row Tracker/Kicker Pick
#812	Box Leather Tool Pouch
#818	Molding Lifter
#824	Deluxe Carpet Clamp
#825	Deluxe Knee Kicker
#716	Carpet Trimmer
#857	Stair Tool
#888S	Seam Roller - Smooth
#790	Seaming Iron
#924	24" Tool Box

24" Tool Box

#924

24 1/2" long x 9 1/2" deep x 9 1/2" high.

Heavy duty comfort grip handle. Cap end construction on the cover and shell makes boxes stronger and more watertight. Protective watershed cover, with staked piano hinge. Wide rolled front edges for added strength and rigidity. Heavyweight hardware, heavily plated to prevent rust. Welded-in tray supports. Sure grip handle on 3 compartment tote tray.



Aluminum Straight Edge

#904 (36") #906 (75")

Anodized finish protects against damage. Nail hole at one end and 45° mitre at the other.

Grooved bottom prevents slipping

LEISTER

Professional LEISTER welding tools for the floor covering industry - including world-famous LEISTER hot air welders - are now available at your favorite tool source. . . Taylor Tools!



Triac ST
#L141.228.KIT



Hot Jet S
#L100.859.KIT



**UNIFLOOR Automatic
Floor Welder**
#L116.133



Power Groover
#L108.395



Hand Tools & Accessories

Here's the **LEISTER** Lineup

Automatic Hot Air Welder

Catalog #	Description	Pk	Wt
L454.335	MINIFLOOR, Automatic Floor Welder	1	12
L116.133	Unifloor E, Automatic Floor Welder	1	29
L115.054	De-Reeler, Unifloor, Welding Rod	1	3
L115.057	Trolley Attachment, Unifloor	1	4
L115.342	Nozzle Squeezed	1	1
L103.394	Welding NozzleW/Air Slot	1	1
L103.602	Heat Element 120v/1800w	1	1

Power Groover

Catalog #	Description	Pk	Wt
L108.395	Power Groover 120v/700w	1	16
L102.401	3.5mmx110mm Blade Power Groover	1	3
L102.402	4mmx110mm Blade Round	1	3
L102.403	2.8mmx110mm Blade Round	1	3
L102.404	2.5mmx110mm Blade Round	1	3
L102.405	3.5mmx110mm Semi Round	1	3
L102.406	3.5mmx110mm Semi Rd Diamond	1	3
L126.448	Tool Box, For Unifloor, Power Groover	1	4

Leister Hot Air Welders & Hot Air Gun

Catalog #	Description	Pk	Wt
L141.228	Leister Triac ST Welder Only	1	2
L141.228.Kit	Leister Triac ST Welder W/Tip	1	2.1
L100.702	Heat Element Triac S	1	1
L100.859	Hot Jet S Welder Only	1	2
L100.859.Kit	Hot Jet S Welder W/Tip	1	2.1
L103.607	Heat Element Hot Jet S	1	1
L100.303	Pencil Tip, 32mmx5mm Push Fit	1	0.5
L107.144	.2" Tubular Nozzle Hot Jet S	1	0.5
L106.989	3mm Nozzle Speed Welding	1	0.5
L106.990	4mm Nozzle Speed Welding	1	0.5
L106.991	5mm Nozzle Speed Welding	1	0.5
L105.431	3mm Nozzle W/Small Air Slide	1	0.5
L105.432	4mm Nozzle W/Small Air Slide	1	0.5
L105.433	5mm Nozzle, Small Air Slide	1	0.5
L140.997	Sonora Heat Gun, S1 120v / 1500w	1	1.2

Hand Tools & Accessories

Catalog #	Description	Pk	Wt
L140.161	Pressure Roller, 28mm Silicone	1	1
L140.598	Ring 15/30x29.6mm, Silicone	5/pk	0.5
L106.969	Spatula Trimming Knife	5/pk	0.2
L122.541	Trimming Guide	1	1
L106.966	Hand Grooving Tool	5/pk	0.5
L106.968	Replacement Blades, Hand Groover	10/pk	0.2
L106.972	Pressure Roller, Brass Ball Bearing	1	1
L107.348	Tool Rest, Triac	1	0.5
L116.586	Tool Case for Triac S, PID	1	4



L228.500 Welding Kit W/Triac ST Welder

Includes:

L141.228	Triac ST
L100.303	Pencil Tip
L106.990	4mm Nozzle
L140.161	Pressure Roller
M.1600.00	Mozart Weld Rod Trimmer
L106.966	Hand Groover
380.00.00	Accu-Trak Groover



#S11.051 hot tip tool



#L154.335 Leister MINIFLOOR Automatic Welder

With the MINIFLOOR Automatic Welder the field of use of the TRIAC can be expanded to countless applications. Turn your hot-air hand tool into an automatic welder in a matter of seconds!



Note: Hot air tool used in conjunction with MINIFLOOR Automatic Welder is sold separately.

Incredibly versatile - highest cost-benefit Ratio

- The TRIAC hot-air tool and its entire nozzle range can be used both for manual welding, as well as with the MINIFLOOR Drive unit for automatic welding. Investment is already worthwhile starting with welding lengths as short as four feet!
- The sophisticated technology of the drive unit and the drive-sensors enable welding directly from the wall. There is only one required joint along the weld seam, and THAT saves time!
- The 51 mm/2 inches minimum distance from the wall, ensures trouble-free welding around construction pipes and L-skirts.

Easy handling

- Weighing in at 5.3 kg/12 lbs (6.6 kg/15 lbs including a TRIAC AT and nozzle) the MINIFLOOR is a lightweight solution among comparable welders and is easily transportable.
- The quick-lock fastening system at the clamp allows for assembling / dismantling of the TRIAC in a matter of seconds. Thanks to the interchangeable inserts, older TRIAC models can be connected without a hitch.

Incredibly fast

- Despite its lightweight design, the MINIFLOOR offers a welding speed of about 2 m/6.5 ft per minute, nearly double the speed of manual welding.



ACCUTRAK GROOVER

Accutrak Groover #380

- Quick, easy, uniform grooves in straight lines or curves
- Easy to adjust and replace blades
- Durable, solid aluminum construction
- Lightweight, compact size
- Five blade widths available (2.5mm - 6mm)

Patent No. 9481101





Parts in the Accu Trak Groover set:

1. Front Guide Plate

380.10.00.SS Stainless Steel Blade
380.10.00.TG Tungsten Blade for Abrasive Material

2. Rear Guide Plate

380.11.00 Guide Plate

3. Dedicated Tip Blade

380.25.00 2.5mm Blade 2/Pk
380.30.00 3.0mm Blade 2/Pk
380.35.00 3.5mm Blade 2/Std
380.50.00 5mm Blade 2/Pk
380.60.00 6mm Blade 2/Pk

4. Sleeve Adaptor

380.25.10 Use for blade sizes 2.5mm, 3mm,
3.5mm

5. Guide Roller

380.12.00 Roller

6. Side Wheels

380.12.05 Axle & Wheels

7. Stainless Steel Truss Head Screw and Washer for Tip Blade

For blade size 3.5mm, use a M4 10mm truss head screw. For blade size 6mm use a M4 8mm truss head screw.

8. Dedicated Rear Blade

380.30.00.REAR 3.0mm Standard

9. Stainless Steel Hollow Screw, 4x6mm

Use to fix the rear blade

10. Accessory Hexagon Wrench


380.35.10 2mm type. Use to screw the stainless steel hollow screw.

MOZART Trimmers


Weld Rod Trimmer

#M.1600.00

- Prevents damage to floor covering with guaranteed uniform trimming results
- Interchangeable blades - no more blade sharpening
- Includes swiveling MOZART spacer claws - no separate guide plate needed
- One-hand operation for less strenuous, more comfortable operation

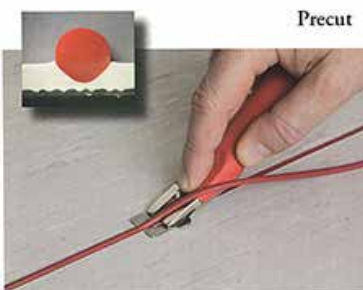

Precut

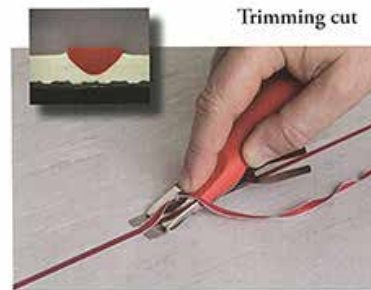

Trimming cut

Speed Trimmer

#M.1610.00

- Make your pre-cut and trimming cut in a single pass
- Operate from a comfortable, productive, upright position
- A four-fold increase in production - ideal for large trimming jobs



Pre-cut and trimming cut in one pass



Fast, comfortable operation

MOZART Accessories



Trimmer Pouch
#M.20.060



Replacement Fastener Set
(1 screw, 3 wave washers)
M.20.041



Spacer Claws
.5mm M.8679.000
7mm M.8700.000



Trimmer Blades
(5 pack) M.8678.000

Knife Blades



Hook Blade
M.105.065



Hook Blade
M.110.065



Hook Blade
M.160.065



Carpet Blade
M.884.040



Utility Blade
M.975.065



Snap-off Hook Blade
M.185.050



Snap-off Straight Blade
M.91.040

RESTORATION TOOLS

Repair Hardwood Floors, Ceramic & Resilient Floors, Cabinets, Doors, Countertops, Wood Trim and More!



#WD911

BEFORE
WOOD DOCTOR™



AFTER
WOOD DOCTOR™



Contents:

DESCRIPTION

Finishing Planer
Hollow Ground Scraper
Hot Knife
Wire Stand, Hot Knife
Felt Pad W/Abrasive
Felt Pad, Smooth
Edge Preparation Pens:
Natural Light
Beech Edge
Cherry Wood
Mahogany
Carrying Case
Thermo-Plastic Polymer

PART NO.

WD161.500
WD911.6005
WD6015
WD440
WD911.6009
WD911.6008
WD911.5542
WD911.5547
WD911.5544
WD911.5550
WD500

Wood Doctor

TPP103 Cherry Wood
TPP109 Light Walnut
TPP113 Light Mahogany
TPP114 Dark Mahogany
TPP119 Light Pearwood
TPP120 Dark Pearwood
TPP122 Dark Macore
TPP157 Mud Oak
TPP158 Light Beech
TPP160 Medium Alder
TPP162 Alder
TPP205 Medium Spruce
TPP302 Rustic Oak
TPP402 Light Color 402
TPP417 Light Color 417
TPP900 Light Transparent

Ceramic/Vinyl Doctor

TPP103 Cherry Wood
TPP109 Light Walnut
TPP110 Medium Walnut
TPP113 Light Mahogany
TPP143 Dark Oak
TPP158 Light Beech
TPP201 Birch/Maple/Ash
TPP205 Medium Spruce
TPP206 Medium Pine
TPP303 Rustic Oak
TPP350 White
TPP980 Transparent Black
TPP1028 Melon Yellow
TPP3000 Flame Red
TPP5002 Ultramarine Blue
TPP6005 Moss Green



#CD911


BEFORE

CERAMIC/VINYL DOCTOR



AFTER

CERAMIC/VINYL DOCTOR





Distributed By:

A Division of Roofing Equipment Inc.

**5045 Paris Street, Denver, Colorado 80239
(303) 371-7667 FAX (303) 371-7669
www.taylorstools.com**

**© Roofing Equipment, Inc.
Denver, Colorado USA 2017. All rights reserved**