YANMAR

MINI EXCAVATOR

ViO17

Weight

Operating weight	1765 kg
Transport weight	1690 kg

Engine

Type	Yanmar 3TNV70-XBV
Fuel	Diesel
Displacement	854 cm^3
Maximum torque	52 N.m. / 1600 tr/min
Net power	10,1 kW

Performance

Travelling speed	2,1 / 4,3 km/h
Rotation speed	9,5 rpm
Digging force (arm)	8,53 kN
Digging force (bucket)	15,2 kN
Grade ability	30°
Noise level (2000/14/CE & 2005/88/CE)	93 dB(A)

Hydraulic system

Maximum pressure	170 bar
2 variable displacement piston pumps	2 x 17,6 l/min
1 gear pump	13,2 l/min

Undercarriage

Ground pressure	0,29 kg/cm²

Capacities

Fuel tank	20 l
Cooling fluid	3,2 l

Dimensions

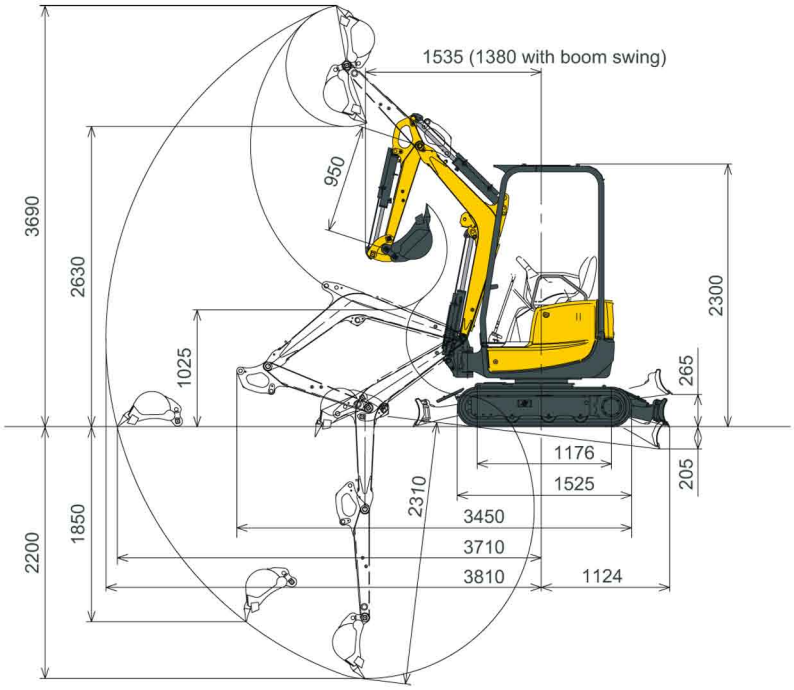

Standard equipment

Canopy ROPS
Road protection for boom arm and bucket cylinders
Proportional 3rd hydraulic circuit line to arm end
Comfort seat
Extendable undercarriage (950 - 1280 mm)
Grease pump and toolbox

Optional equipment
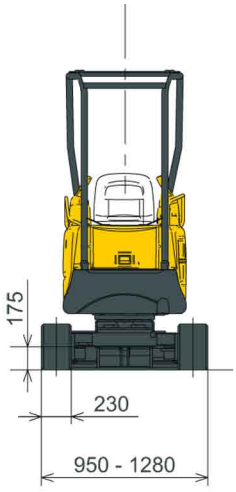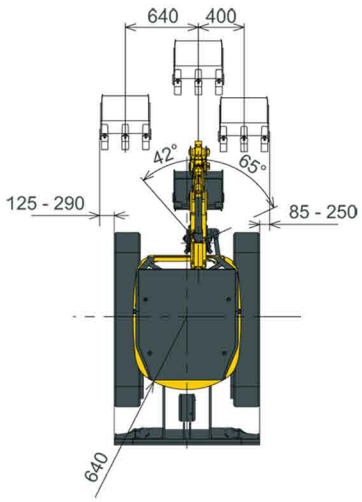
Prolongation of the 3rd circuit to arm end
Quick couplers on the 3rd circuit
Mechanical quick hitch
Anti-theft device (with key / keyboard)
Standard, ditch cleaning and swivelling buckets
Hydraulic breaker
Beacon light